


Front face kit for 3 elements with 2 2P sockets and 2 gloss black buttons Simon 100

REF. 10020322-138

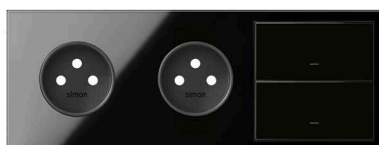

BASIC INFORMATION

FINISH

Gloss black

ETIM CLASS

EC000007

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

TYPE OF MECHANISM

Momentary switch / Insert button

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CLAW

INSTALLATION DIRECTION

Horizontal and vertical

TYPE OF TERMINAL

CONNECTION - FUNCTION 1

1 click connection (1 click®)

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

universal

INSTALLATION TYPE

Suitable for flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2: 2008*2 + IEC 60884-1 Ed. 3.2*1

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053232613

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053232613

PACKAGING VOLUME

480295.2

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

25.3

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

84

PACKAGING NET WEIGHT

0.132

UNITARY PACKAGING GROSS
WEIGHT

0.132

PACKAGING LENGTH

226

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.132