


Rocker with viewer for push button switch with indicator light function for 1 element aluminium Simon K45

REF. K114/8

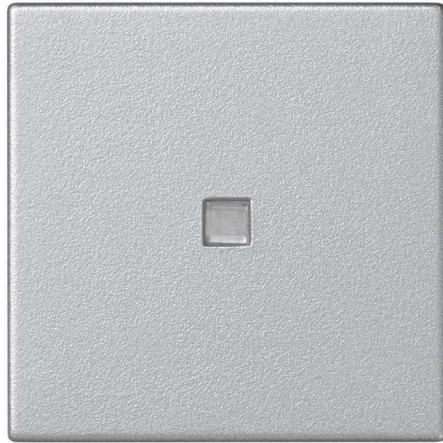

BASIC INFORMATION

DESCRIPTION

With elegant finishes, the aluminium rocker with viewer for push-button switch with indicator light function for 1 element has dimensions of 45x45x10 mm and is part of the wide range of products that make up the series Simon K45. This product guarantees the no-propagation spread in case of fire, in addition to a toxicity minimum against any smoke thanks to its manufacturing in halogen-free thermoplastic, so that it is a product that complies with a highly secure all the guarantees European quality. We at Simon take it very seriously the security of any place. For this purpose, we have created the Simon K45 line, composed of all kinds of solutions designed to meet to the most demanding environments. Because we concern for always be at the height of the conditions.

FINISH

Aluminium

MATERIAL

Plastic

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-033)

PACKAGING CONTENTS

Rocker and installation manual

ETIM CLASS

EC000011

REMARKS

Used to signal the mechanism and spot it in the dark

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

AVAILABLE IN

Quarter and half module versions

KIT AVAILABILITY

No

NUMBER OF MODULES

Half

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VERSION

Single

INDICATOR FUNCTION

Yes

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER

Only with tool

TYPE OF FASTENING

Fixing by direct snap-fit, no tools needed

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-033)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

PRODUCT NET WEIGHT
0.055

PACKAGING MEASUREMENT
UNIT
MMT

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING VOLUME
544320

UNITARY PACKAGING LENGTH
0

PACKAGING EAN
8426436047136

PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING VOLUME
544320

UNITS CONTAINED PACKAGING
5

PACKAGING GROSS WEIGHT
0.275

UNITARY PACKAGING VOLUME
UNIT
MMQ

PACKAGING HEIGHT
72

PACKAGING NET WEIGHT
0.275

UNITARY PACKAGING GROSS
WEIGHT
0.055

PACKAGING WIDTH
72

PACKAGING WEIGHT UNIT
KGM

PACKAGING LENGTH
105