
Flush-mount trim cover square shallow floor box for 4 elements grey Simon 500 Cima

REF. **52053202-035**

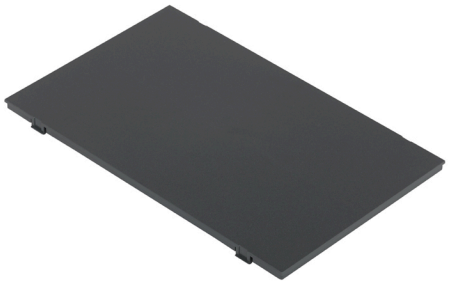

BASIC INFORMATION

DESCRIPTION

This complete kit for floor box for shallow floor box belongs to the Simon 500 Cima range. The kit is designed to be flush mounted into raised or concrete floor. For this last you will need to be combined with a plastic with reference G 201. The kit is designed for 4 elements and is made up of a double socket and 2 plates 1RJ45 ® and is presented in a beautiful grey colour it is ideal for any room in which it is placed. The product has dimensions of 252 x 180 millimetres and x 69 millimetres of depth and consists of 4 modules. The manufacturing materials of the kit are of high quality, which gives it a resistance and hardness extra that will extend the service life of the product, it is metal components with self-extinguishing and halogen-free thermoplastic insulation., which means in case of fire it does not contribute to flame spread, lending safety to the final set.

FINISH

Grey

PACKAGING CONTENTS

Trim cover

MATERIAL

Plastic

ETIM CLASS

EC002417

REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
4, 6 and 8 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

IK CLASSIFICATION
08

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
4 modules

RAL
7011

VERSION
4 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised or concrete floor with shallow floor boxes

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053101704

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.09

PRODUCT NET WEIGHT
0.09

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053101704

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
5

PACKAGING WIDTH
130

PACKAGING LENGTH
210

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
136500

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.09

PACKAGING WEIGHT UNIT
KGM