

POINT spotlight Rail 3000 K Wide Flood Black

REF. 92001003-388



BASIC INFORMATION

BODY MATERIAL

Die-cast aluminium

PACKAGING CONTENTS

1 Unit

ETIM CLASS

EC001744

APPLICATION

Domestic,Office,Retail,Contract

PACKAGING DIMENSIONS (MM)

160x255x234 mm

REMARKS

Includes a laser positioner for focusing

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

DIRECTIONAL

Yes

LUMENS (LM)

1450 lm

IP RATING

IP20

DRIVER INCLUDED

Yes

NUMBER OF LUMINAIRES

1

OPERATING TEMPERATURE RANGE (°C)

0 - 35 °C

ELECTRICAL CLASS

III

MACADAM STEPS

<3 Step MacAdam

POWER SUPPLY (V~)

100/277 V~

ENERGY EFFICIENCY

A+

OPTICS

Wide Flood 45°

RAL

9005

L70 (°C)

100000h at 25°C

PHOTOBIOLOGICAL CLASSIFICATION

Class II

COLOR TEMPERATURE (K)

3000 K

L90 (°C)

40000h at 25°C

POWER FACTOR (Φ)

> 0,98

CONTROL

On Board Dimmer,Laser

COLOR TYPE

NW

POWER (W)

25 W


CRI

90

LIGHTING EFFICIENCY (LM/W)

88 lm/W

PHOTOMETRY ASSETS - POLAR

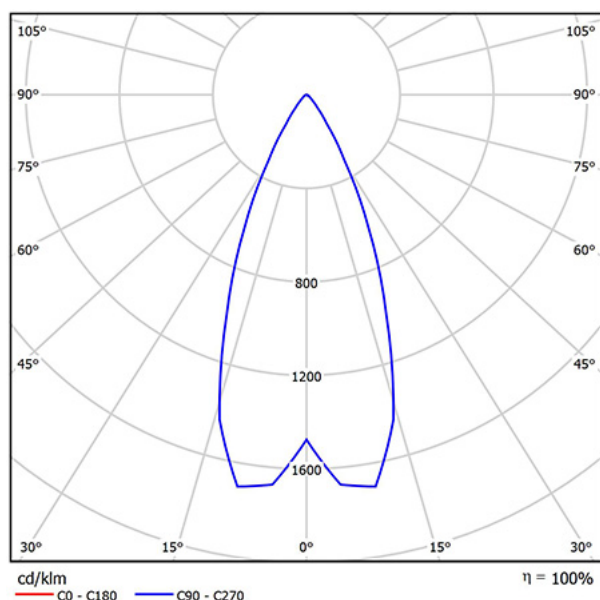

INSTALLATION AND MAINTENANCE

INSTALLATION ALTERNATIVES

Flush-mounted

INSTALLATION TYPE

Rail

REGULATIONS

EAC MARKED

Yes

ECORRAE MARKED

Yes

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8436547034512

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8436547034512

PACKAGING VOLUME

10014720

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

234

PACKAGING GROSS WEIGHT

1.12

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

255

PACKAGING NET WEIGHT

1.02

UNITARY PACKAGING GROSS
WEIGHT

2.38

PACKAGING LENGTH

160

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

1.02