


## Switch for card 5A 230V~ with light indicator and adjustable timing from 0 seconds to 10 minutes

REF. 75558-39

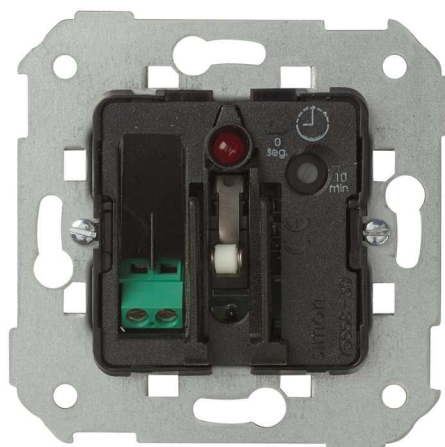

### BASIC INFORMATION

#### COMPATIBILITY

Frames Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations, Simon 44 Aqua, Simon 75, Simon 82 Detail, Simon 82 Nature and Simon 82

#### PACKAGING CONTENTS

Mechanism and instructions

#### ETIM CLASS

EC001590

#### REMARKS

It is recommended to protect the faston connectors with a heat shrink sleeve.

## TECHNICAL INFORMATION

|                                                          |                                  |                                                      |
|----------------------------------------------------------|----------------------------------|------------------------------------------------------|
| <b>CABLE SECTION ADMITTED (MM)</b><br>From 1,0 to 1,5 mm | <b>FREQUENCY (HZ)</b><br>50 Hz   | <b>TYPE OF MECHANISM</b><br>Card                     |
| <b>CONSUMPTION INDICATOR (MA)</b><br>1 mA                | <b>INDICATOR FUNCTION</b><br>Yes | <b>OPERATING TEMPERATURE RANGE (°C)</b><br>5 - 40 °C |
| <b>DISCONNECTION TIMER</b><br>0 seconds to 10 minutes    | <b>CURRENT (A)</b><br>5 A        | <b>STORAGE TEMPERATURE RANGE (°C)</b><br>-25 - 50 °C |
| <b>NUMBER OF POSSIBLE ELEMENTS</b><br>1 element          | <b>IP RATING</b><br>IP20         | <b>VOLTAGE (V~)</b><br>250 V~                        |

## INSTALLATION AND MAINTENANCE

|                                             |                                                                     |                                                              |
|---------------------------------------------|---------------------------------------------------------------------|--------------------------------------------------------------|
| <b>CABLE STRIPPING NECESSARY (MM)</b><br>10 | <b>INSTALLABLE IN FLUSH MOUNT JUNCTION BOX</b><br>Universal         | <b>KIT INSTALLATION DIRECTION</b><br>Vertical and horizontal |
| <b>CLAW</b><br>Simon 27                     | <b>INSTALLATION TYPE</b><br>Suitable for surface and flush mounting | <b>TYPE OF TERMINAL CONNECTION - FUNCTION 1</b><br>Screw     |

## REGULATIONS

### REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN IEC 61058-1:2018 | EN 61058-1-1:2016 | EN IEC 63000:2018

## LOGISTICS INFORMATION

|                                           |                                         |                                      |
|-------------------------------------------|-----------------------------------------|--------------------------------------|
| UNITARY EAN CODE<br>8421053058381         | UNITARY PACKAGING WEIGHT<br>UNIT<br>KGM | UNITS CONTAINED PACKAGING<br>1       |
| UNITARY PACKAGING GROSS<br>WEIGHT<br>0.09 | UNITARY PACKAGING WIDTH<br>0            | PACKAGING MEASUREMENT<br>UNIT<br>MMT |
| UNITARY PACKAGING HEIGHT<br>0             | PACKAGING EAN<br>8421053058381          | PACKAGING VOLUME<br>329232           |
| UNITARY PACKAGING LENGTH<br>0             | PACKAGING GROSS WEIGHT<br>0             | PACKAGING VOLUME UNIT<br>MMQ         |
| PRODUCT NET WEIGHT<br>0.09                | PACKAGING HEIGHT<br>57                  | PACKAGING WEIGHT UNIT<br>KGM         |
| UNITARY PACKAGING VOLUME<br>329232        | PACKAGING LENGTH<br>76                  | PACKAGING WIDTH<br>76                |
| UNITARY PACKAGING VOLUME<br>UNIT<br>MMQ   | PACKAGING NET WEIGHT<br>0.09            |                                      |