
Ceiling trim for column with 2 sides oval white Simon K45

REF. **RALK003/8**

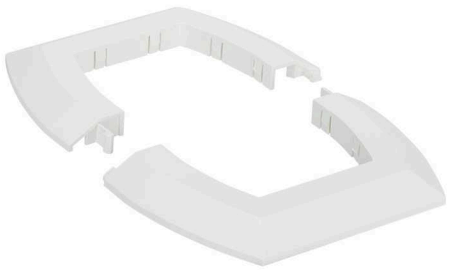

BASIC INFORMATION

DESCRIPTION

Ceiling trim for oval column with two sides. Commitment to a simple and functional finish in white. This trim belongs to the series Simon K45 of products fixed to the floor. It is made of a thermoplastic material, free of halogen components. Thanks to these materials are optimises the operation of the product at a temperature range very variable (-25 ° to + 120 degrees centigrade), in addition, the thermoplastic of Simon products, which minimizes the toxicity in case of smoke, in addition to prevent the propagation of fires. The product measures exactly 137 x 167 millimetres, with a depth of 12 millimetres. This trim has been envisaged as a replacement part, in the case of which is lost or must replacing the original. It delivers injected in white plastic colour. For cleaning you just need to use a dry and soft cloth, free of abrasive cleaning products that contain chlorine in their formulation.

FINISH

White

PACKAGING CONTENTS

Ceiling trim

MATERIAL

Plastic

ETIM CLASS

EC002980

REMARKS

Product envisaged as a replacement part, in the event of loss or substitution. It is supplied injected in white plastic.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
1-sided, 2-sided (square and oval) and 4-sided

DIELECTRIC STRENGTH
Without perforation or contournament with 2000 V at 50H during 1 minute

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60° C

EARTHING RESISTANCE
< 0.05 ?

HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)
5 MOhms at 500 V.

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 a 120° C

RAL
9003

VERSION
2-sided (Oval)

INSTALLATION AND MAINTENANCE

TYPE OF FASTENING
Through direct snap-fit of the two parts on the column profile (does not require the use of tools for fastening)

INSTALLATION DIRECTION
Horizontal

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE
8426436056428

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.055

PRODUCT NET WEIGHT
0.055

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436056428

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
20

PACKAGING WIDTH
180

PACKAGING LENGTH
120

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
0.432

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.055

PACKAGING WEIGHT UNIT
KGM