


2-way switch 16AX 250V~ with 1click® terminal connection system

REF. 7700211-039

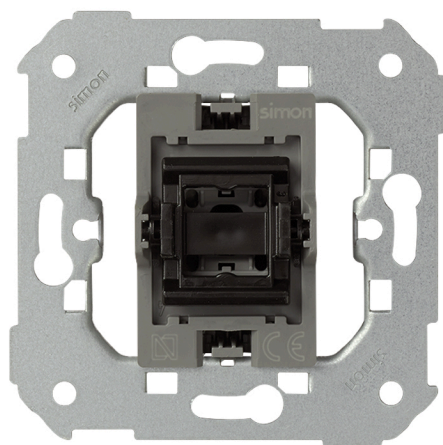

BASIC INFORMATION

DESCRIPTION

It is a 2-way switch 16AX 250V~ with 1click ® terminal connection system. This method of installation is much easier and quicker than others, as you do not need to strip cables, so times are reduced considerably. The 2-way switch is included in the Simon 77 series and is suitable for surface or flush mounting. It has been manufactured from metal components with insulation in halogen-free thermoplastic material in compliance with the legislation. Also, it is an article that resists extreme temperatures very well. However, ideally, it should be installed in environments with a temperature range between 5 and 40°C. On the other hand, the collection offers the possibility of implementing signaling function via cradle blinking and rocker with viewer. The Simon 77 series is synonymous with innovative mechanisms, which allow you to clamp without stripping or braiding cables, a revolution of the brand.

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

PACKAGING CONTENTS

Mechanism and instructions

ETIM CLASS

EC001590

REMARKS

Possibility of implementing signalling function using cradle blinking and rocker with viewer

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

No

OPERATING TEMPERATURE

RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CURRENT (A)

16 AX

STORAGE TEMPERATURE RANGE

(°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CLAW

Simon 27

INSTALLATION TYPE

Suitable for surface and flush mounting

TYPE OF TERMINAL

CONNECTION - FUNCTION 1

1 click connection (1 click®)

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2:2008 + EN 60998-2-3:2004

LOGISTICS INFORMATION

UNITARY EAN CODE 8421053256497	UNITARY PACKAGING GROSS WEIGHT 0.064	PACKAGING LENGTH 223
UNITARY PACKAGING HEIGHT 0	PRODUCT NET WEIGHT 0.064	PACKAGING MEASUREMENT UNIT MMT
UNITARY PACKAGING WIDTH 0	UNITARY PACKAGING WEIGHT UNIT KGM	PACKAGING VOLUME 1.518
UNITARY PACKAGING LENGTH 0	PACKAGING EAN 8421053080092	PACKAGING VOLUME UNIT DMQ
UNITARY PACKAGING MEASUREMENT UNIT MMT	UNITS CONTAINED PACKAGING 5	PACKAGING GROSS WEIGHT 0
UNITARY PACKAGING VOLUME 0	PACKAGING HEIGHT 82	PACKAGING NET WEIGHT 0.32
UNITARY PACKAGING VOLUME UNIT MMQ	PACKAGING WIDTH 83	PACKAGING WEIGHT UNIT KGM