Plate for MCB or RCCB for 2 elements installation in floor boxes graphite Simon 500 Cima

REF. **50010074-038**



BASIC INFORMATION

DESCRIPTION

With graphite finishes, the plate for miniature circuit breaker or residual current circuit breaker for 2 elements of the Simon 500 Cima collection, it is the perfect solution to obtain the maximum workplace solutions and functionality in the minimum space. Designed for installation in floor boxes, both wall-mounted as concrete or false ceiling, its DIN format and its size of 100 x 50 mm, with a depth of 46 mm, guarantee total integration of the set in the space. It is made up of thermoplastic materials halogen-free; guarantees no flame propagation and toxicity by smoke in case of fire. Also, and thanks to this material can reach a maximum temperature of over 90 ° C. This mechanism is only for installation in floor boxes of the collection Simon 500 Cima; in case of installing another enclosure, it is recommended to use the reference 50000074-038.

FINISH

Graphite

COMPATIBILITY

Floor boxes Simon 500 Cima

ETIM CLASS

EC002498

MATERIAL

Plastic

PACKAGING CONTENTS

Simon 500 Cima plate for MCB or differential, DIN rail adaptor for installation in floor boxes, and installation manual

REMARKS

Is only suitable for installation in Simon 500 Cima floor boxes If installing in another enclosure you must use article no.50000074-038.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

Plate specifically for floor boxes, with another version for other Simon 500 Cima enclosures (wall boxes, mini towers, mini columns, columns, metal enclosures)

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

FORMAT

DIN

IP RATING

IP20

KIT AVAILABILITY

No

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

NUMBER OF MODULES

2

RAL

7021

VERSION

2 elements

INSTALLATION AND MAINTENANCE

TYPE OF FASTENING

By direct snap-fit on the frame of the selected floor box (no tools needed for fastening)) You first need to fasten the DIN rail adaptor for floor boxes and the MCB or RCCB

INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE

Suitable for installing in floor boxes, either concrete or raised floor

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60898-1:2003 + EN 60898-1:2003 A1:2004 + EN 60898-1:2003 A11:2005 + EN 60898-1:2003 A12:2008 + EN 60898-1:2003 A13:2012

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
26

UNITARY PACKAGING WIDTH
58

UNITARY PACKAGING LENGTH
86

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
129688

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.047

PRODUCT NET WEIGHT
0.047

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053095874

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
26

PACKAGING WIDTH
58

PACKAGING LENGTH
86

PACKAGING MEASUREMENT UNIT
MMT

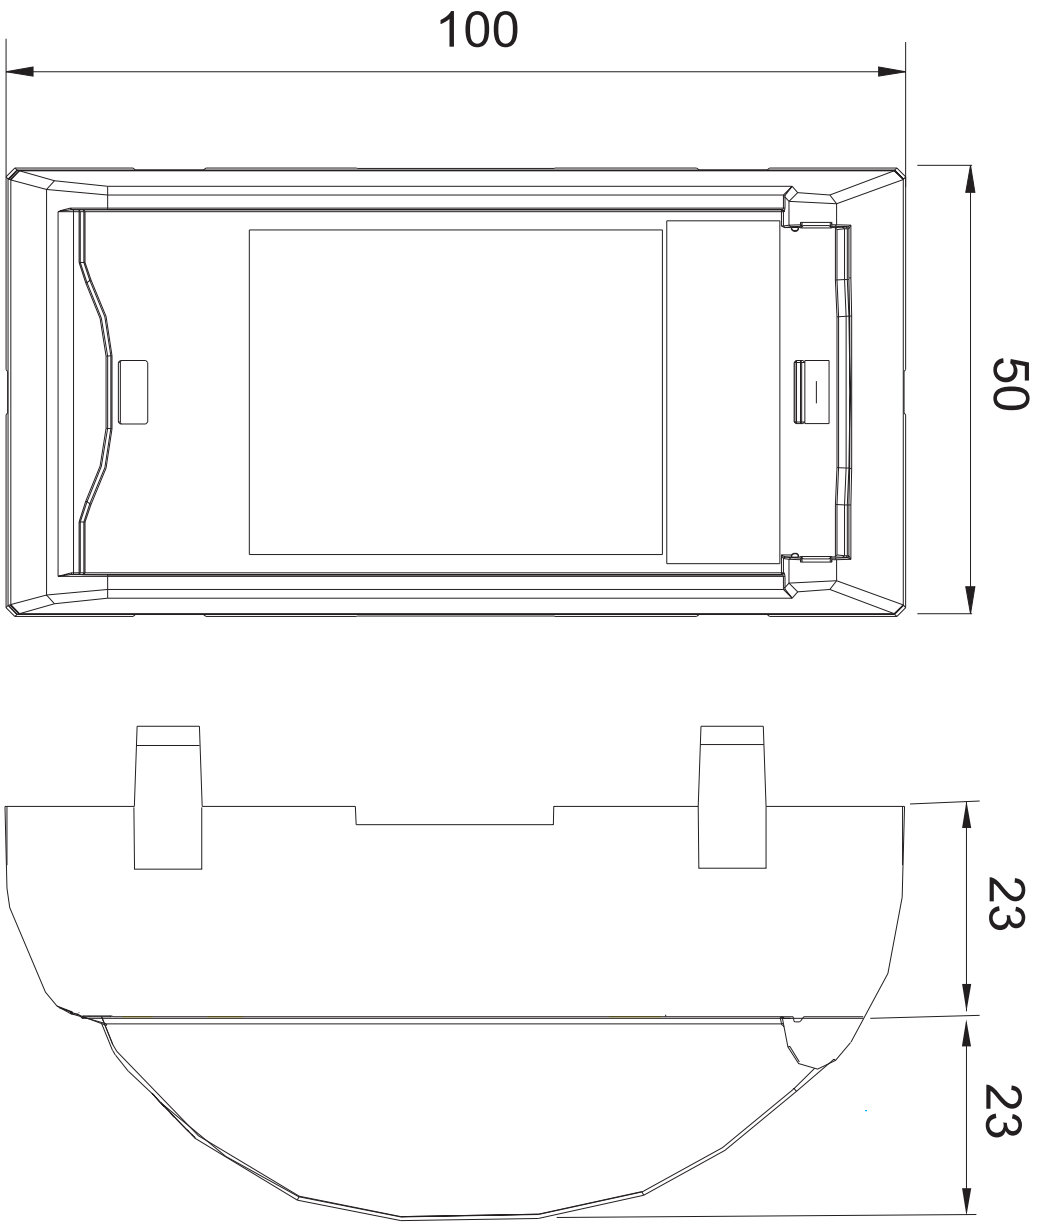
PACKAGING VOLUME
3524976

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.47

PACKAGING WEIGHT UNIT
KGM


100
50
23
23