


2-way-rotary dimmer switch with light indicator from 40 to 500W/VA

REF. 75318-39

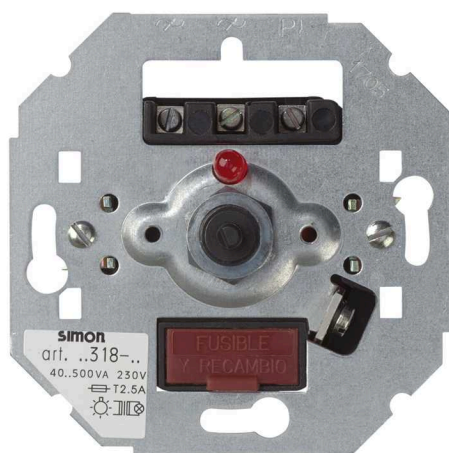

BASIC INFORMATION

DESCRIPTION

Control the light intensity of the room with the - rotary regulator 2-way switch from 40 to 500 W / VA of the Simon 75 collection, with signaling function for beacon and position the mechanism in situations of a low lighting, this regulator 2-way switch consists of 2 wires and 1 circuit. Its electronic components are asylum seekers with halogen-free thermoplastic to ensure greater security in case of fire, being able to reach a temperature range of 20 to 70 °C. Designed for installation in recessed or surface-mounted with screw terminal connection, it is compatible with a voltage of power of 230 Volts, halogen charges of 500 W and electromagnetic transformer of 350 W. It must be taken into account that, in the same circuit, it is not possible to connect two electronic voltage regulators. Innovation, functionality and energy efficiency as a guarantee of - regulator 2-way switch Simon 75.

COMPATIBILITY

Frames Simon 31, Simon 75,
Simon 82 Detail, Simon 82
Nature and Simon 82

COMPATIBLE WITH 230V INCANDESCENT AND HALOGEN LAMPS (W)

500 W

COMPATIBLE WITH MECHANICAL SWITCH

No

COMPATIBLE WITH MECHANICAL 2-WAY/CROSSOVER SWITCH

Yes

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

PACKAGING CONTENTS

Dimmer and instruction sheet

ETIM CLASS

EC000025

REMARKS

Two main electronic voltage regulators cannot be connected in the same circuit.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	NUMBER OF POSSIBLE ELEMENTS 1 element	MAXIMUM QUANTITY PER CIRCUIT 1
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	COMPATIBLE WITH FLUORESCENT LAMPS WITH 1- 10V DIMMABLE ELECTRONIC BALLAST No	TYPE OF MECHANISM Rotary
NUMBER OF CONTACTS 3		MINIMUM POWER (W) 40
NUMBER OF CONTROLLABLE CIRCUITS 1	COMPATIBLE WITH FLUORESCENT LAMPS (VA) No	COMPATIBLE WITH MOTORS (VA) No
COMPATIBLE WITH HALOGENS WITH ELECTROMAGNETIC TRANSFORMER (W) 350 W	INDICATOR FUNCTION Yes	OPERATING TEMPERATURE RANGE (°C) 0 - 40 °C
COMPATIBLE WITH ELECTRONIC AUXILIARY No	IP RATING IP20	POWER SUPPLY (V~) 230 V~
COMPATIBLE WITH HALOGENS WITH ELECTRONIC TRANSFORMER (W) No	COMPATIBLE WITH LOW CONSUMPTION (W) No	STORAGE TEMPERATURE RANGE (°C) 20 - 75 °C
	MAXIMUM POWER (W) 500	VERSION Single
		NUMBER OF WIRES 2

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 5	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Included		

REGULATIONS

REGULATIONS

UNE-EN-60669-2-1:2005+A1:2010+A12:2011

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053021927

PRODUCT NET WEIGHT

0.14

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

329232

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053021927

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0.14

UNITARY PACKAGING VOLUME

329232

PACKAGING HEIGHT

57

PACKAGING NET WEIGHT

0.14

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING WIDTH

76

PACKAGING WEIGHT UNIT

KGM

UNITARY PACKAGING GROSS WEIGHT

0.14

PACKAGING LENGTH

76