# Metal mini tower with 4 heights and 1 side for 8 elements stainless steel Simon 500 Cima

REF. **52510214-036**



## BASIC INFORMATION

### DESCRIPTION

This metal mini-tower 4 heights, 1 side is suitable for 8 elements and manufactured in stainless steel. The product belongs to the Simon 500 Cima series and has dimensions of 298,5 x 221 x 68 mm. The mini-tower is suitable for installing on any floor type, whether raised or concrete. The centre frames of this article include linkable parts that form blocks, allowing separation of the electrical part from the voice and data part for easier maintenance. Complies with the current regulation and is characterized by an extraordinary resistance to high temperatures. For cleaning, it is recommended to use a soft and dry cloth, avoiding abrasive cloths and cleaners containing chlorine. Simon 500 Cima is a collection whose mechanisms to ensure high speed data transmission. They offer an optimal bending radius and more space for the cabling.

### FINISH

Metal

### MATERIAL

Stainless steel

### COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

### PACKAGING CONTENTS

Metal mini tower, metal partition wall, ground connection cable, fixing studs, screws and installation manual

### ETIM CLASS

EC001941

### REMARKS

The frame holders include linkable parts that form blocks, allowing the electrical part to be separated from the voice and data part for ease of maintenance

## TECHNICAL INFORMATION

### AVAILABLE MARKET
CE

### PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

### PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

### AVAILABLE IN
1 and 2 sides

### MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

### ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the housings fitted into the box for this purpose.

### IK CLASSIFICATION
08

### IP RATING
IP4X

### KIT AVAILABILITY
Yes

### MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 120° C

### NUMBER OF MODULES
8

### VERSION
1 side

## INSTALLATION AND MAINTENANCE

### REMOVAL OF COMPONENTS
Only with tool

### TYPE OF FASTENING
Using the screws supplied

### REMOVAL OF THE FRAME
Only with tool

### INSTALLATION DIRECTION
Vertical

### INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

### SCREWS REQUIRED FOR FLOOR FIXING
4

## REGULATIONS

### REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

# LOGISTICS INFORMATION

UNITARY EAN CODE
8421053099322

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
1.941

PRODUCT NET WEIGHT
1.941

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053099322

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
67

PACKAGING WIDTH
168

PACKAGING LENGTH
398

PACKAGING MEASUREMENT UNIT
MMT

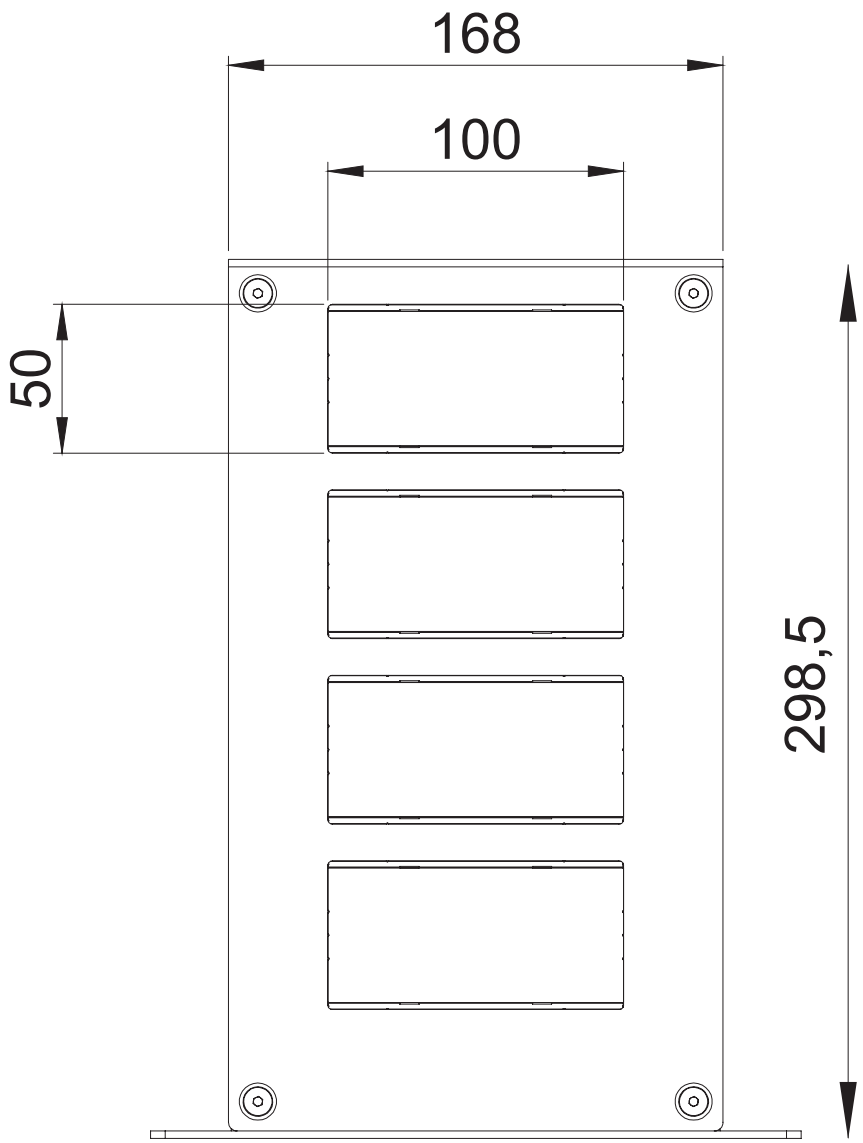
PACKAGING VOLUME
4.48

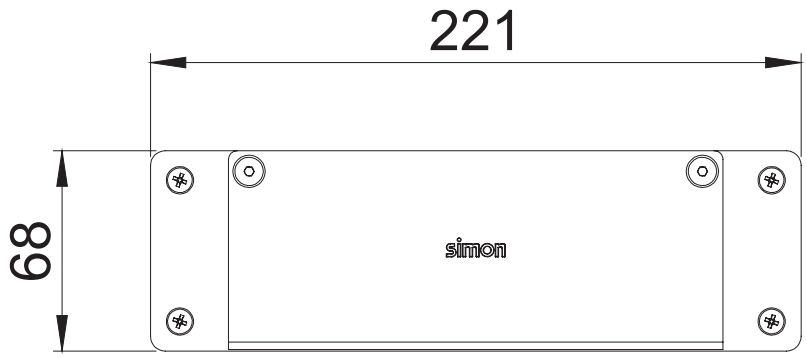
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.941

PACKAGING WEIGHT UNIT
KGM


168
100
50
298,5


221
68
simon