

## Flat voice and data plate half element with dust cover for 1 Systimax® RJ45 connector white Simon 27 Play

REF. 27099-34



## BASIC INFORMATION

### DESCRIPTION

Plate of voice and data flat plate, half element, with dust cover with 1 RJ45 connector Systimax white in colour of the Simon 27 Play series is available in 3 different finishes, but it is always recommended to choose the frame of the same colour of the plate that we select. The plate of voice board is RJ45 format. The flat voice and data plate is of individual version, this model of voice and data plate includes half an element and a module but does not include signaling function. The limit of the recommended temperature range is from 5 to 40°C reaching maximum temperatures of -25 to 50°C. It is suitable for installations in surface mounting or flush mounting. The voice and data plate does not apply regulation. The manufacturing material of the voice and data plate is thermoplastic, with a white plastic finish. The dimensions of the cover are 22,5x45mm. This voice and data plate is flat, compatible with AVAYA connectors. It has a connector and a dust shutter, includes an RJ45 adaptor module. This model of voice and data plate does not include any type of engraving.

### FINISH

White

### MATERIAL

Plastic

### PACKAGING CONTENTS

Plate

### SYMBOL

Without engravings

### COMPATIBILITY

Simon 75 connectors

### ETIM CLASS

EC000018

### REMARKS

Available in 5 finishes. It is recommended to choose a frame the same colour as the selected plate.

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### COMPATIBLE WITH CONNECTORS

AVAYA

### NUMBER OF CONNECTORS

1

### DUST SHUTTER

Yes

### NUMBER OF POSSIBLE ELEMENTS

Half element

### FORMAT

RJ45

### INDICATOR FUNCTION

No

### IP RATING

IP20

### MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### NUMBER OF MODULES

1 module

### OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

### PLATE TYPE

Flat

### RJ45 ADAPTOR MODULE

Included

### STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

### VERSION

Single

## INSTALLATION AND MAINTENANCE

### INSTALLATION DIRECTION

Horizontal, Vertical

### INSTALLATION TYPE

Suitable for surface and flush mounting

## REGULATIONS

### REGULATIONS

Directive 2011/65/UE RoHS + EN 50581:2012

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8421053072042

### UNITARY PACKAGING HEIGHT

23

### UNITARY PACKAGING WIDTH

22

### UNITARY PACKAGING LENGTH

47.2

### UNITARY PACKAGING MEASUREMENT UNIT

MMT

### UNITARY PACKAGING VOLUME

0.024

### UNITARY PACKAGING VOLUME UNIT

DMQ

### UNITARY PACKAGING GROSS WEIGHT

0.007

### PRODUCT NET WEIGHT

0.006

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING EAN

8421053072042

### UNITS CONTAINED PACKAGING

10

### PACKAGING HEIGHT

86

### PACKAGING WIDTH

162

### PACKAGING LENGTH

212

### PACKAGING MEASUREMENT UNIT

MMT

### PACKAGING VOLUME

2.954

### PACKAGING VOLUME UNIT

DMQ

### PACKAGING GROSS WEIGHT

0.068

### PACKAGING NET WEIGHT

0.06

### PACKAGING WEIGHT UNIT

KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO


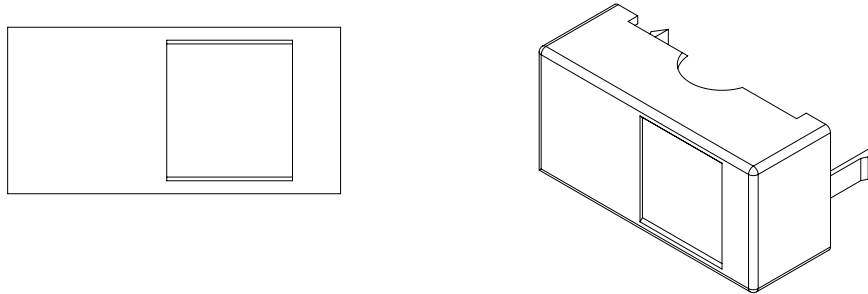


DIAGRAMA DE MONTAJE

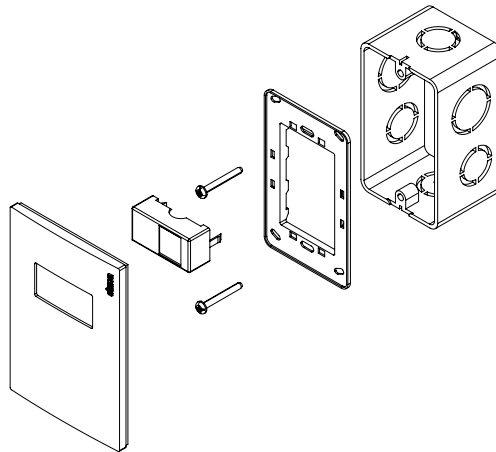

\*Placa y chasis NO incluidos