Single-pole switch 10AX 250V~ for half element with built-in light indicator and fast terminal connection system white Simon 27 Play

REF. **27104-64**



BASIC INFORMATION

DESCRIPTION

This control mechanism is a single-pole switch of the Simon 27 Play range, with dimensions 22.5 x 45 millimetres, is designed for medium element 10 AX of intensity and 250 volts. Also comes with built-in indicator light. In this sense, in case you want to replace the indicator light, it offers the possibility of combining it with the product with reference 2700802-064, of the same series. It stands out for its quick terminal connection and its easy installation, which offers the possibility of carried out by means of flush mounting or directly by surface mounting, so the product is very versatile. Its rocker operation is intuitive and very user-friendly.. They stand out for their manufacturing materials of great resistance, consisting of metal components with halogen-free thermoplastic insulation and thermoset trim, which, in addition to increasing the safety of the end product. Its maintenance is as simple, just wipe with a soft, dry cloth, no need for any products.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

REMARKS

Can be combined with article 2700802-064 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)

0.55 mA

NUMBER OF POSSIBLE ELEMENTS

Half element

INDICATOR FUNCTION

Yes

CURRENT (A)

10 AX

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Pivoting

NOMINAL VOLTAGE (V~)

250 V~

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, American, Small spaces and Centralisations

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-1:2018|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053251508

UNITARY PACKAGING HEIGHT
22.6

UNITARY PACKAGING WIDTH
38.1

UNITARY PACKAGING LENGTH
45.5

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
39178.23

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.024

PRODUCT NET WEIGHT
0.024

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053035726

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
53

PACKAGING WIDTH
160

PACKAGING LENGTH
220

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1.866

PACKAGING VOLUME UNIT
DMQ


PACKAGING GROSS WEIGHT
0.485

PACKAGING NET WEIGHT
0.48


PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interruptor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interruptor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

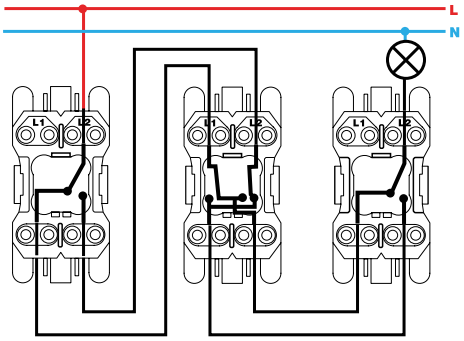


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches



Interruptor unipolar / Single-pole switch
XX00102-XX




Interruptor bipolar / Double pole switch
XX00134-XX

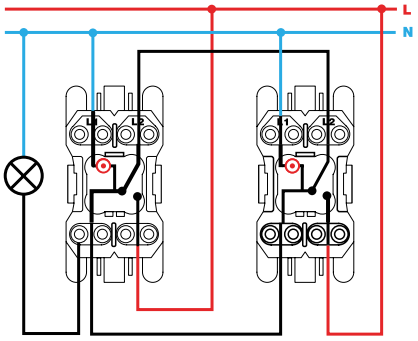


Conmutador / 2-way switch
XX00202-XX


Mecanismos con luminoso / Switches with light




Interruptor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

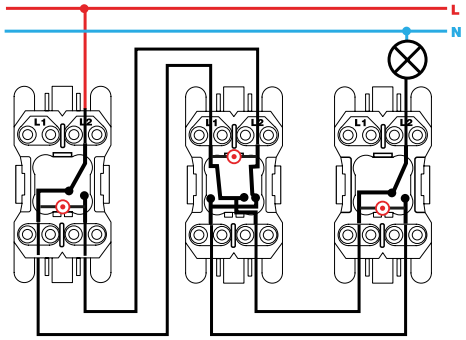

Conmutador cruce / Intermediate switch
XX2700254-XX