

## ARCH S Downlight Round 4000 K Wide Flood 1-10 V White

REF. 91531003-400



### BASIC INFORMATION

#### BODY MATERIAL

Die-cast aluminium

#### PACKAGING CONTENTS

1 Unit

#### ETIM CLASS

EC001744

#### APPLICATION

Domestic, Office, Retail, Hotel, Contract

#### PACKAGING DIMENSIONS (MM)

16x224x171 mm

## TECHNICAL INFORMATION

### FREQUENCY

50 - 60 Hz

### DIRECTIONAL

Yes

### LUMENS (LM)

750 lm

### IP RATING

IP43

### DRIVER INCLUDED

Yes

### NUMBER OF LUMINAIRES

1

### OPERATING TEMPERATURE RANGE (°C)

0 - 35 °C

### ELECTRICAL CLASS

II

### MACADAM STEPS

<3 Step MacAdam

### POWER SUPPLY (V~)

110/240 V~

### ENERGY EFFICIENCY

A+

### OPTICS

Wide Flood 60°

### RAL

9016

### L70 (°C)

100000h at 25°C

### PHOTOBIOLOGICAL CLASSIFICATION

Class II

### COLOR TEMPERATURE (K)

4000 K

### L90 (°C)

30000h at 25°C

### POWER FACTOR (Φ)

> 0,9

### CONTROL

1-10 V, Push Dim

### COLOR TYPE

CW

### POWER (W)

9 W


### CRI

80

### LIGHTING EFFICIENCY (LM/W)

111 lm/W

## PHOTOMETRY ASSETS - POLAR

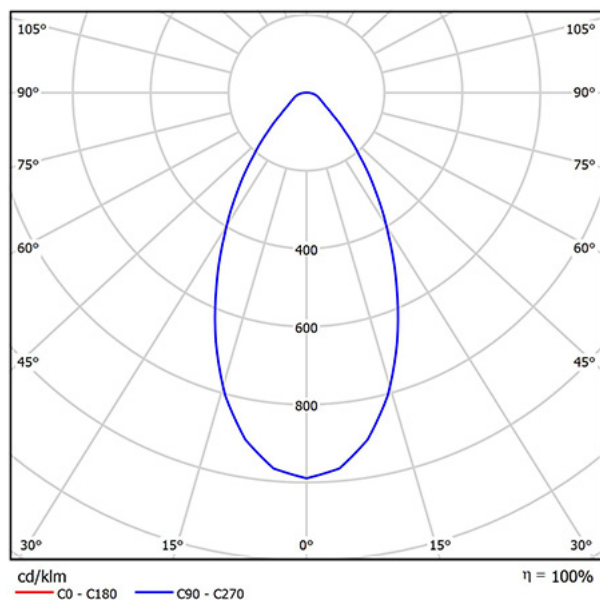

## INSTALLATION AND MAINTENANCE

### INSTALLATION ALTERNATIVES

Flush-mounted, Trimless

### INSTALLATION TYPE

Surface-mounted

## REGULATIONS

### EAC MARKED

Yes

### ECORRAE MARKED

Yes

### WARRANTY

5 years

## LOGISTICS INFORMATION

UNITARY EAN CODE

8436547038053

UNITARY PACKAGING WEIGHT  
UNIT

KGM

PACKAGING MEASUREMENT  
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8436547038053

PACKAGING VOLUME

4567500

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

116

PACKAGING GROSS WEIGHT

1.2

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

171

PACKAGING NET WEIGHT

1.09

UNITARY PACKAGING GROSS  
WEIGHT

1.32

PACKAGING LENGTH

224

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

1.09