

Double-pole switch 16AX 250V~ with built-in pilot light and screw terminal connection system white Simon 27 Play

REF. 27134-65



BASIC INFORMATION

DESCRIPTION

Double-pole switch 16 AX and 250 V~ with incorporated pilot light and screw-terminal connection system white in colour and belonging to the Simon 27 Play series, it has a fast-terminals connection and can be found in the category of "control mechanisms" with a tilting type of operation, its installation is suitable for surface mounting or flush mounting. The Simon 27 Play series wants customers to enjoy decorating and for that reason they have created a revolutionary concept to take the initiative to redecorate your own spaces, it also has a series of covers and rockers sleeves that can make thousands of combinations. In addition, it has solutions for all kinds of environments, you can adapt the switch in all kinds of environments. The switch is made of metal components with halogen-free thermoplastic insulation and a thermoset trim, making it fully functional at temperatures ranging from 5 ° C to 40 ° C.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 16 AX	NOMINAL VOLTAGE (V~) 250 V~
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP20	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CONSUMPTION INDICATOR (MA) 0.55 mA	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Single
INDICATOR FUNCTION Yes		

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal, American and Centralisations	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLATION DIRECTION Horizontal, Vertical	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053251553

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

1201200

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.04

PRODUCT NET WEIGHT

0.04

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053036037

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

52

PACKAGING WIDTH

105

PACKAGING LENGTH

220

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1201200

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.395

PACKAGING NET WEIGHT


0.4

PACKAGING WEIGHT UNIT


KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interrupor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

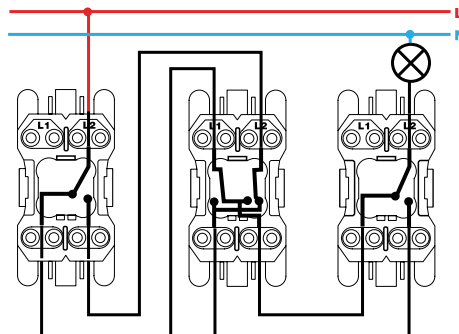


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches




Interrupor unipolar / Single-pole switch
XX00102-XX




Interrupor bipolar / Double pole switch
XX00134-XX

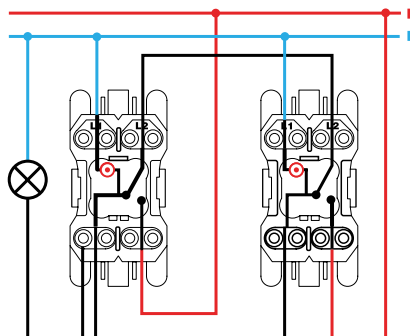


Conmutador / 2-way switch
XX00202-XX




Interrupor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

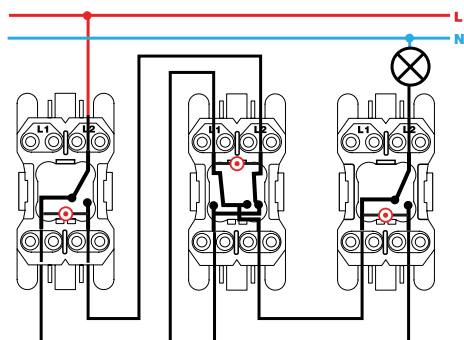

Conmutador cruce / Intermediate switch
XX2700254-XX