
Cover for German double socket outlet mechanism with viewer and LED indicator aluminium Simon 500 Cima

REF. **50011041-033**

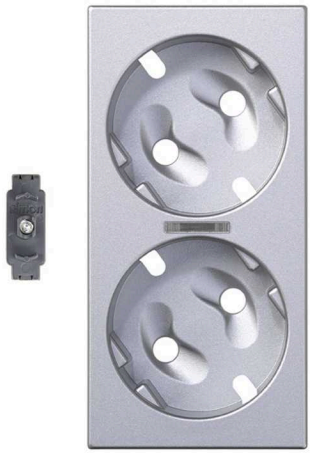

BASIC INFORMATION

DESCRIPTION

Cover for the mechanism of the double Schuko socket outlet, which includes a viewer and indicator led. Its finish is a stylish aluminium and belongs to the Simon 500 Cima series. This is the version of two elements and two modules of the cover. This cover Simon has a signaling function and its dimensions are 100 x 50 millimetres, with a depth of 9 millimetres. It is worth noting that the cover needs to be combined with a double socket-outlet, with schuko format. The manufacturing materials of this Simon product they bet for the security and quality, thanks to its thermoplastic components, free of halogens, they support extreme temperatures, both low and high. For their longer service life simply clean the cover with a soft cotton, without any cleaning product that contains chemical abrasive or is with the Simon product.

FINISH

Aluminium

MATERIAL

Various

COMPATIBILITY

German double socket outlets Simon 500 Cima

PACKAGING CONTENTS

Cover for German double socket outlet mechanism with viewer and LED light indicator and installation manual

ETIM CLASS

EC000011

REMARKS

Must be combined with a German double socket outlet

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

Plate with viewer and LED light indicator, plate without viewer and as a replacement for plate with viewer

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60 °C in surface-mount wall installation and +90 °C in flush-mount wall installation

FORMAT

Schuko

INDICATOR FUNCTION

Yes

IP RATING

IP20

KIT AVAILABILITY

Yes

LED CONSUMPTION INDICATOR (MA)

0.55

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

NUMBER OF MODULES

2

VERSION

2 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER

Only with tool

TYPE OF FASTENING

By direct snap-fit on the double socket outlet (no tools needed for fastening))

INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface or flush-mount installation

REGULATIONS

REGULATIONS

Dir. 2011/65/UE RoHS + post. mod.|EN IEC 63000:2018|IEC 60884-1 Ed. 3.2|UNE 20315-1-1:2017|UNE 20315-1-2:2017|DS 60884-2-D1:2023

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053254714

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.035

PRODUCT NET WEIGHT
0.035

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053093535

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
52

PACKAGING WIDTH
105

PACKAGING LENGTH
220

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
1.201

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.35

PACKAGING WEIGHT UNIT
KGM

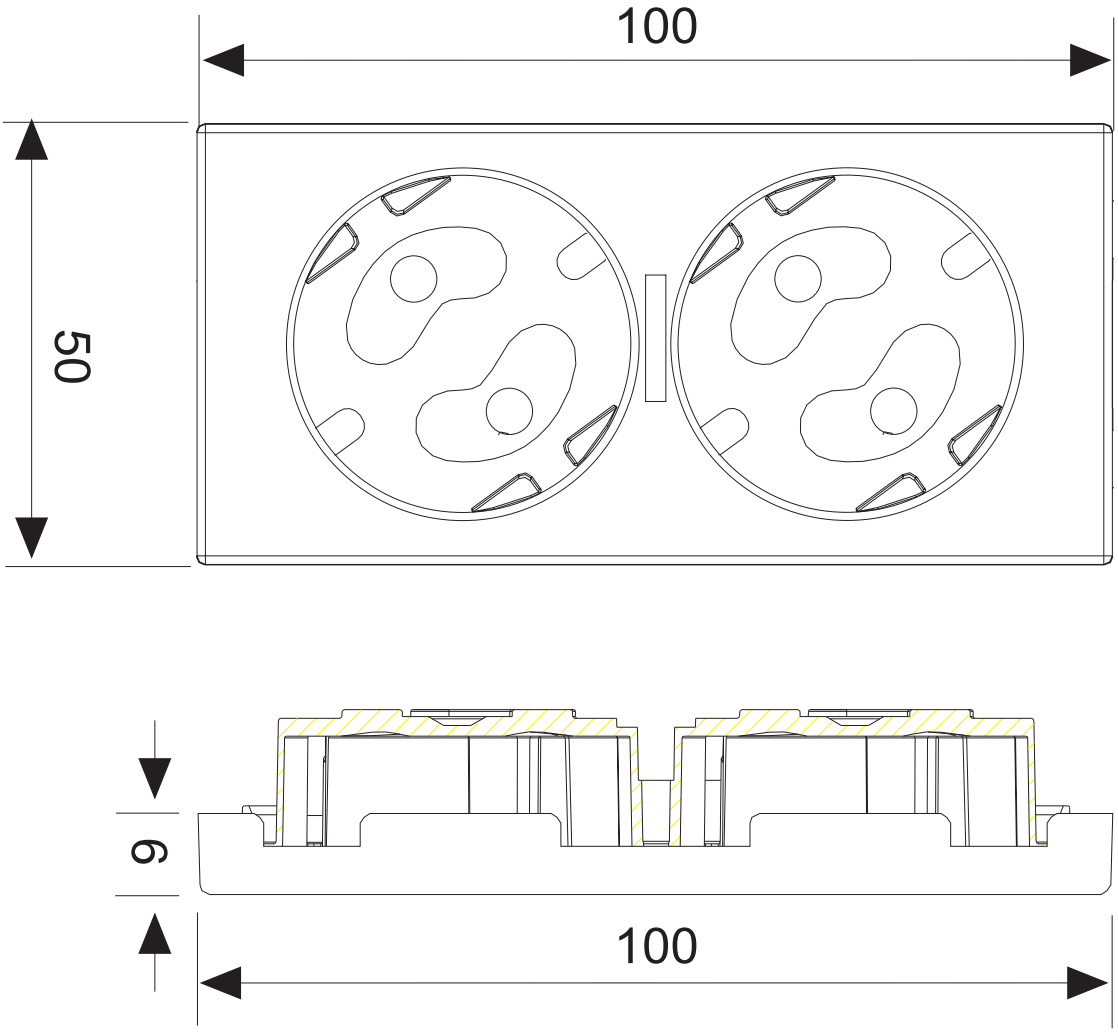
100
50
6
100