

Neutral push button 10AX 250V~ with fast terminal connection system white Simon 27 Play

REF. 27659-65



BASIC INFORMATION

DESCRIPTION

This push-button switch 10A 250V~ neutral is finished in white and offers a quick terminal connection system, which reduces the times considerably. The article is included in the Simon 27 Play series and measures 45x45 mm. This is manufactured with metal components with halogen-free thermoplastic insulation and thermoset trim. These materials are characterized by its resistance to extreme temperatures and also against scratches, providing maximum protection for the user. The push-button switch is suitable for surface or flush mounting installation and is in compliance with the current regulation. If you wish, you can replace the finish of the supplied rocker, having 7 additional to choose. The reference is compatible with the frames of the series Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralizations and Simon 44 Aqua, so that you have several options available to combine it in your preferences.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

MATERIAL

Thermoplastic

ETIM CLASS

EC000029

REMARKS

Possibility of substituting the finish of the rocker supplied with a different one. 7 additional finishes available.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 A

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VERSION

Single

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American and
Centralisations

INSTALLATION DIRECTION

Horizontal, Vertical

INSTALLATION TYPE

Suitable for surface and flush
mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053252628

UNITARY PACKAGING HEIGHT

45.3

UNITARY PACKAGING WIDTH

36.7

UNITARY PACKAGING LENGTH

45.9

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0.076

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.03

PRODUCT NET WEIGHT

0.03

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053044711

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

48.5

PACKAGING WIDTH

85.7

PACKAGING LENGTH

224.5

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

0.933

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0.25

PACKAGING NET WEIGHT

0.3

PACKAGING WEIGHT UNIT

KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO


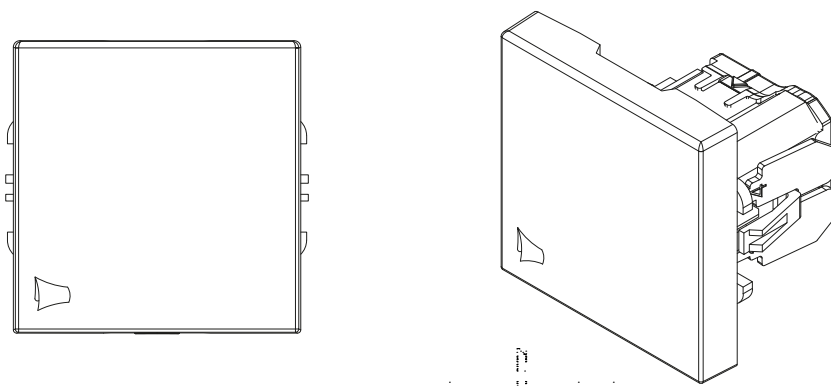


DIAGRAMA DE MONTAJE



*Placa y chasis NO incluidos

DIAGRAMA DE CONEXIÓN

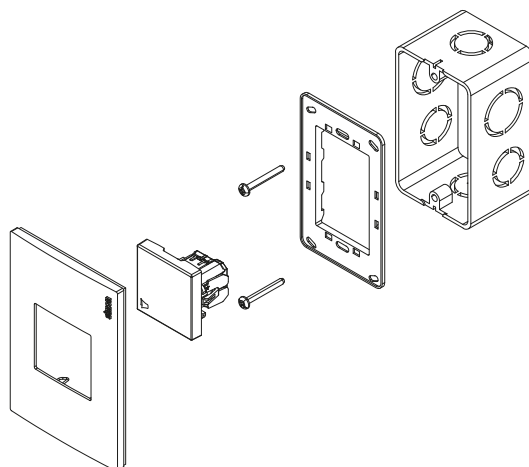