
Simon iO key for dimmer switch gloss black Simon 100

REF. **10002020-138**

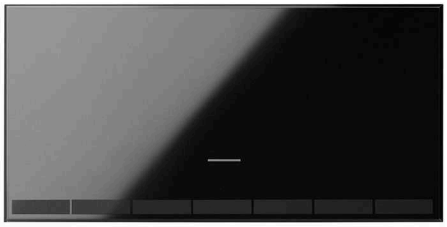

BASIC INFORMATION

DESCRIPTION

The Simon iO switch for the dimmable switch of the Simon 100 collection allows you to turn the light on or off thanks to a soft touch. It is presented in glossy black, a discreet colour perfect for any room, and its manufacture has the PMMA material with thermoplastic base, which, together with an IP protection of 20 (the maximum possible), gives it a great capacity for resistance and durability.

Its installation must be done horizontally. For proper maintenance, the ideal is to install it in environments between 0 and 40ºC during its operation, while its storage must respect the interval between -25 and 75ºC. In addition, it is advisable to clean it with a soft cloth dampened in soapy water, avoiding the use of abrasive cleaners that have chlorine between their components. Following these cleaning guidelines, the switch will last much longer in your home.

It is a device that presents a type of power supply that occurs from mechanism, which has 7 LEDs and that follows the Z-wave protocol, occupying half an element. For its implementation, directive 2011/65 / UE RoHS + directive 2014/53 / UE RED + EN 50581: 2012 + EN 60669-2-5: 2016 + ETSI-300-220-2 v2.4.1 have been followed.

FINISH

Gloss black

COMPATIBILITY

Simon 100 mechanisms

ETIM CLASS

EC000011

MATERIAL

Plastic

PACKAGING CONTENTS

Rocker

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

NUMBER OF POSSIBLE ELEMENTS
Half element

INDICATOR FUNCTION
No

CONNECTIVITY PROTOCOL
Z-wave

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

OPERATING TEMPERATURE RANGE (°C)
0 - 40 °C

STORAGE TEMPERATURE RANGE (°C)
-25 - 75 °C

VERSION
Single

INSTALLATION AND MAINTENANCE

INSTALLATION DIRECTION
Horizontal

INSTALLATION TYPE
Suitable for flush mounting

REGULATIONS

REGULATIONS
Directive 2011/65/UE RoHS + Directive 2014/53/UE RED + EN 50581:2012 + EN 60669-2-5:2016 + ETSI-300-220-2 v2.4.1

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053146620

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.032

PRODUCT NET WEIGHT
0.032

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053146620

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
25.3

PACKAGING WIDTH
36

PACKAGING LENGTH
71.5

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
65122.2

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.25

PACKAGING NET WEIGHT
0.032

PACKAGING WEIGHT UNIT
KGM