Aluminium mini column with 2 sides for 8 elements per side white Simon 500 Cima

REF. **52550224-030**



BASIC INFORMATION

DESCRIPTION

Practical mini-tower manufactured in materials plastics divided into two sides, with four connections on each side. Thanks to its minimalist configuration will allow us to perform the connection of up to 8 elements with comfort and saving space. With dimensions of 154 x 126 x 122 mm and a beautiful white finish allows us to summon him in any ambience mimicking perfectly in rooms of all types. Allows quick and easy installation emplazada directly to any type of floor using screws and it is possible to integrate into a floor trunking 85 x 18 mm with a specific baseboard ref.52554204-030. Its manufacture in thermoplastic materials and carentes insulation we ensures a high level of quality and security for your electrical installation, guaranteeing no flame spread in case of fire in case of fire. Another excellent choice to meet the needs of connectivity solutions for any user profile with all the guarantees.

FINISH

White

MATERIAL

Aluminium

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

PACKAGING CONTENTS

Mini column, baseboard, lower and upper trim, non-slip adhesive foam, fixing studs, ground connection cable, screws and installation manual

ETIM CLASS

EC001941

REMARKS

The shape of the baseboard allows integration of the mini column with the 85 x 18 mm floor trunking

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
1 and 2 sides

MAX TEMP DURING CONSTRUCTION WORK (°C)
+120 °C

EARTHING RESISTANCE
< 0.05 Ohms

ELECTRICAL PROPERTIES
With electrical continuity

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Constant clearance between electric wiring and Voice, Data and Multimedia cables, eliminating electromagnetic interference and possible transmission errors.

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 to +120 °C

NUMBER OF MODULES
8 per side

RAL
9003

VERSION
2 sides

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

SCREWS REQUIRED FOR FLOOR FIXING
4

REMOVAL OF TRIM FRAMES
Only with tool

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053094464

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
2.89

PRODUCT NET WEIGHT
2.89

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053094464

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
124

PACKAGING WIDTH
142

PACKAGING LENGTH
900

PACKAGING MEASUREMENT UNIT
MMT

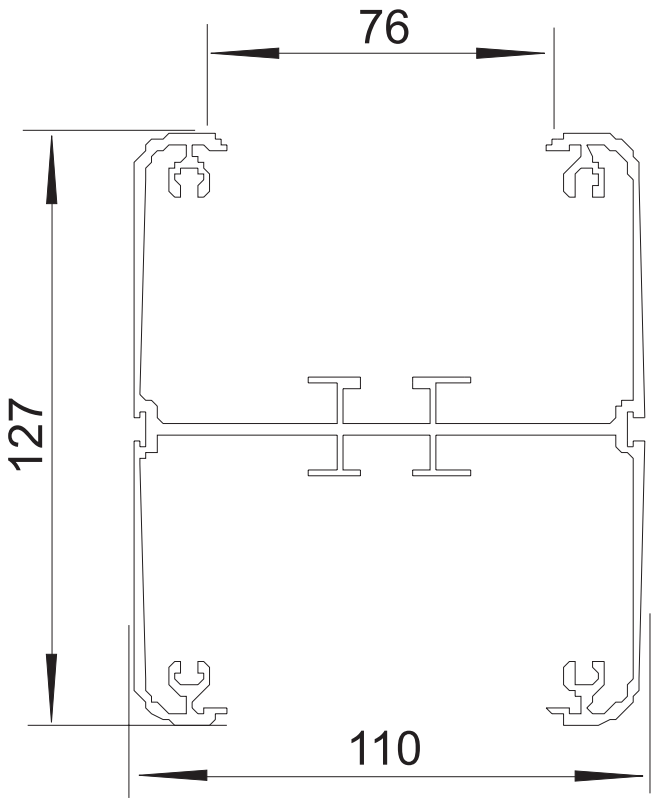
PACKAGING VOLUME
12370560

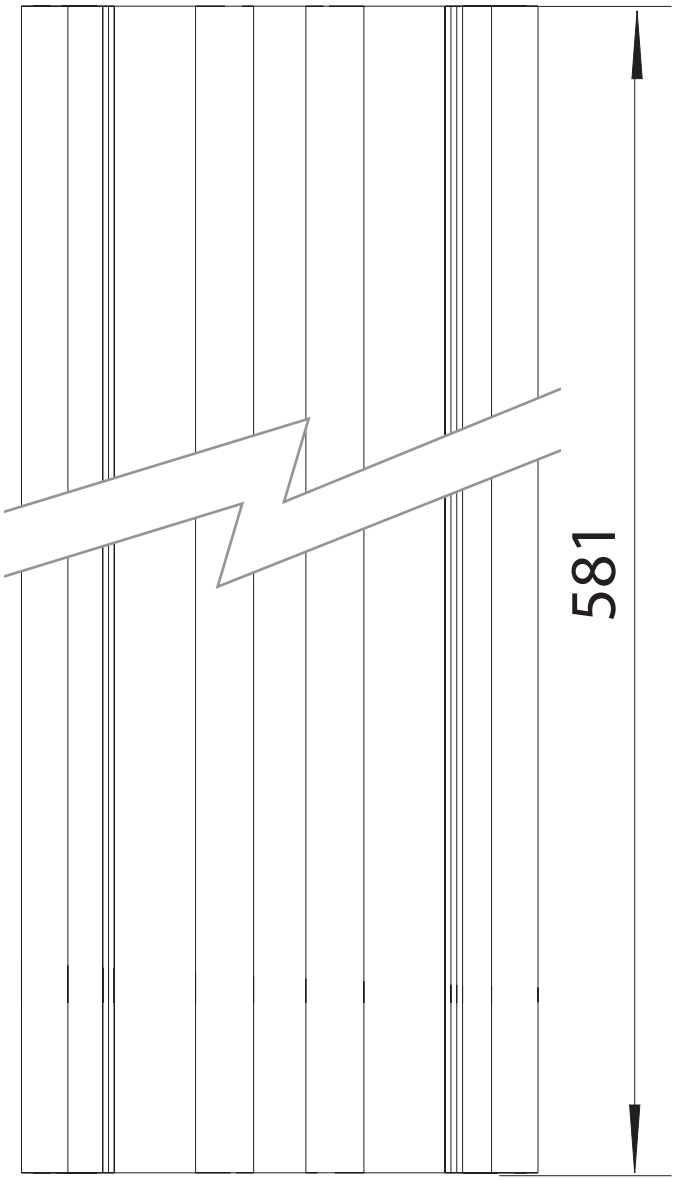
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
2.89

PACKAGING WEIGHT UNIT
KGM


76
127
110


581