Metal mini tower with 2 heights and 1 side for 4 elements stainless steel Simon 500 Cima

REF. **52510212-036**



BASIC INFORMATION

DESCRIPTION

Stylish torre metal made in stainless steel perfect to meet the needs of connectivity solutions in the home or work. With a structure functional distributed in two heights with links for four elements in the same face we facilitara a change of connection fast and secure as ordered. It has dimensions of 172,5 x 221 x 68 mm by doing so that can be adapted to any cabin and can be easily disassembled using linkable blocks to perform a maintenance easier. Allows its installation in garden both floor and concrete floor, depending on the needs of each user. The Simon 500 Cima series supplied components of high quality, designed by and for professionals which need the best guarantees in its products, convirtiéndolos elements in the most recommended in the sector. It is recommended to clean with a soft, dry cloth and avoid the use of abrasive cleaners or cloths containing chlorine for optimum maintenance of the product.

FINISH

Metal

MATERIAL

Stainless steel

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

PACKAGING CONTENTS

Metal mini tower, metal partition wall, ground connection cable, fixing studs, screws and installation manual

ETIM CLASS

EC001941

REMARKS

The frame holders include linkable parts that form blocks, allowing the electrical part to be separated from the voice and data part for ease of maintenance

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
1 and 2 sides

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the housings fitted into the box for this purpose.

IK CLASSIFICATION
08

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 120° C

NUMBER OF MODULES
4

VERSION
1 side

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using the screws supplied

REMOVAL OF THE FRAME
Only with tool

INSTALLATION DIRECTION
Vertical

INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

SCREWS REQUIRED FOR FLOOR FIXING
4

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053099285

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
1.343

PRODUCT NET WEIGHT
1.343

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053099285

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
69

PACKAGING WIDTH
189

PACKAGING LENGTH
226

PACKAGING MEASUREMENT UNIT
MMT

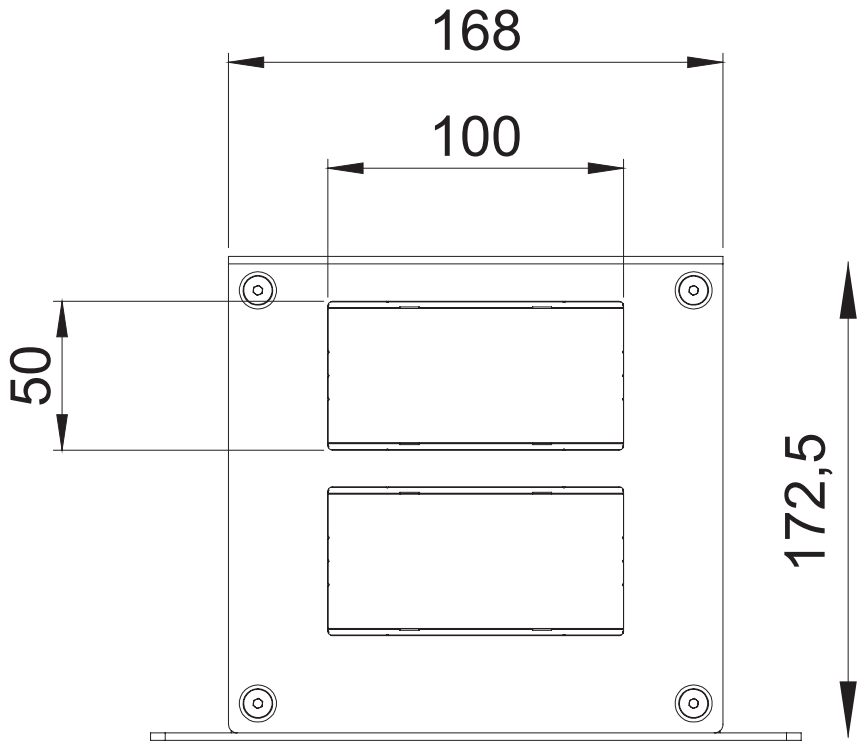
PACKAGING VOLUME
2.947

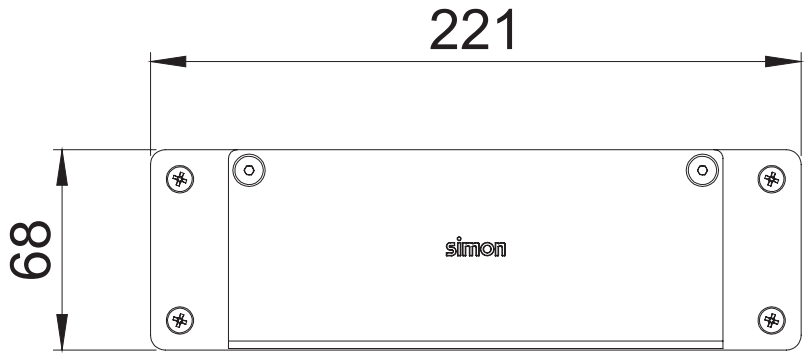
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.343

PACKAGING WEIGHT UNIT
KGM


168
100
50
172,5


221
68
simon