

Bell push button with viewer 16A 127V graphite Simon 25 Plus

REF. 25160-38



BASIC INFORMATION

FINISH

Graphite

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)

3,3 mm

CURRENT (A)

16 A

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

NOMINAL VOLTAGE (V~)

127/220 V~

POWER SUPPLY (V~)

127/220 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY
(MM)

11

TYPE OF TERMINAL
CONNECTION - FUNCTION 1

Fast

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
22.2

UNITARY PACKAGING WIDTH
42.5

UNITARY PACKAGING LENGTH
41.2

UNITARY PACKAGING
MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0.039

UNITARY PACKAGING VOLUME
UNIT
DMQ

UNITARY PACKAGING GROSS
WEIGHT
19.12

PRODUCT NET WEIGHT
16

UNITARY PACKAGING WEIGHT
UNIT
GRM

PACKAGING EAN
7506020301071

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
45

PACKAGING WIDTH
85

PACKAGING LENGTH
224

PACKAGING MEASUREMENT
UNIT
MMT

PACKAGING VOLUME
0.857

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0.366

PACKAGING NET WEIGHT
320

PACKAGING WEIGHT UNIT
KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO


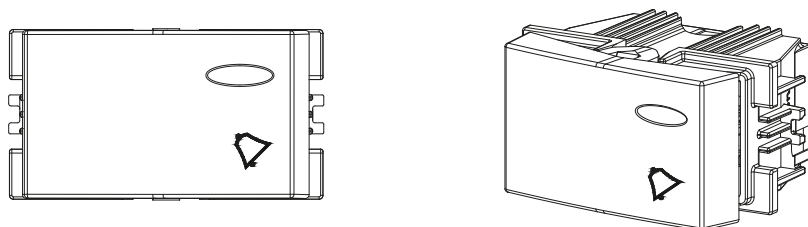


DIAGRAMA DE MONTAJE



*Placa y chasis NO incluidos

DIAGRAMA DE CONEXIÓN

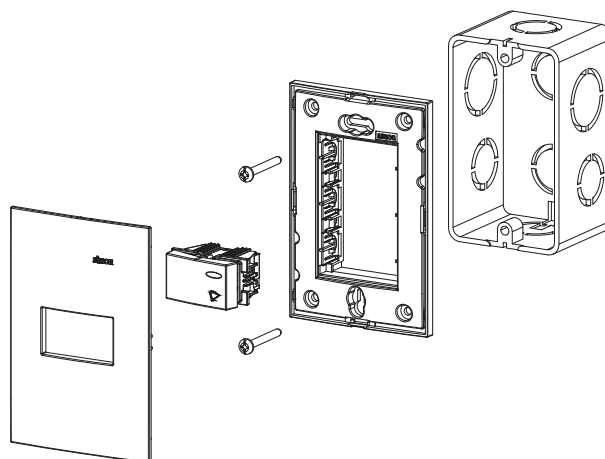