


**Group of 2 push buttons 10 A 250V~ (2 inputs + 2 outputs),
suitable for shutter mechanisms without interlocking
system with quick connector Simon 75**

REF. 75396-39

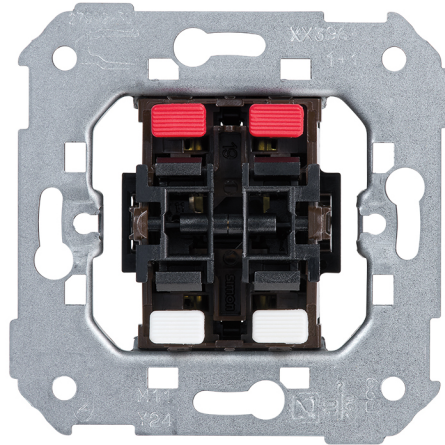

BASIC INFORMATION

DESCRIPTION

The Group of two push buttons with a current of 10 AX and voltage of 250V~ that includes two inputs and two outputs meets market demands. It is suitable for blind mechanisms without an interlocking system with quick terminal connection. We are looking at a valid mechanism for products included in the Simon 75 and 82 series. For its installation, the use of a universal flush-mounted box is necessary, or alternatively, a surface socket is required and it needs a control device. Designed to withstand extreme environmental conditions thanks to the metallic components with thermoplastic insulation free of halogens with which it has been manufactured. Its technical characteristics are completed with a cable section of 1.5 to 2.5 mm and a cable stripping of 11 mm. Maximum quality at the best price.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept, and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

REMARKS

Mechanism equipped without interlocking. Requires control device.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP21

RECESS DIMENSION (MM)

30

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

LATCH TYPE

Non-latching

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF CONTACTS

4

LINKABLE

No

VERSION

Double

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INDICATOR FUNCTION

No

MONOBLOCK

No

NUMBER OF WIRES

4

CURRENT (A)

10 A

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

CLAW

Simon 27

REMOVAL OF COVER

Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for surface and flush
mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053256015

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.063

PRODUCT NET WEIGHT

0.063

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053017555

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

83

PACKAGING WIDTH

165

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.635

PACKAGING NET WEIGHT

0.63

PACKAGING WEIGHT UNIT

KGM

