


Touch auxiliary with built-in blue light for items 75305-69 and 75322-69

REF. 75306-69

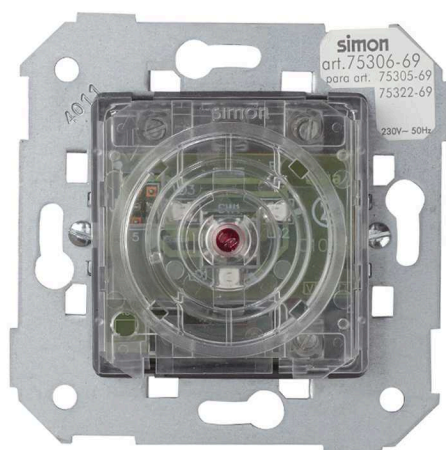

BASIC INFORMATION

DESCRIPTION

Touch assistant with incorporated blue light for the references 75305-69 and 75322-69 belonging to the series Simon 75. The element requires a power of 230V~. Its typology is regulator / 2-way switch. It includes a screw terminal connection and its operation is by pulsation. Allows the use of up to 15 auxiliary elements in the same circuit. The installation is made easier thanks to the compatibility with the mechanisms of the Simon 77 series that incorporates the one click function, a fast and safe system since you will not have to use any extra tools or peel some wire. In this way, just by inserting and pressing it will allow the element to work at 100%. The elements are manufactured by means of electronic components with halogen-free thermoplastic insulation that, in addition to the infinite personalization options, you will have a wide selection of products for every corner of your home.

COMPATIBILITY

Simon 31, Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

COMPATIBLE WITH MECHANICAL 2-WAY/CROSSOVER SWITCH

No

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

COMPATIBLE WITH MECHANICAL SWITCH

No

PACKAGING CONTENTS

Auxiliary and instruction sheet

ETIM CLASS

EC000011

REMARKS

Allows the use of up to 15 auxiliary elements in the same circuit.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	COMPATIBLE WITH FLUORESCENT LAMPS WITH 1- 10V DIMMABLE ELECTRONIC BALLAST	MAXIMUM QUANTITY PER CIRCUIT
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	No	15
CONSUMPTION INDICATOR (mA) 1.5 mA	COMPATIBLE WITH FLUORESCENT LAMPS (VA)	TYPE OF MECHANISM Push
NUMBER OF CONTACTS 3	No	MINIMUM POWER (W) 40
NUMBER OF CONTROLLABLE CIRCUITS 1	FREQUENCY 50 Hz	COMPATIBLE WITH MOTORS (VA) No
DISCONNECTION TIMER 15 minutes	INDICATOR FUNCTION Yes	OPERATING TEMPERATURE RANGE (°C) 0 - 55 °C
COMPATIBLE WITH ELECTRONIC AUXILIARY	IP RATING IP20	POWER SUPPLY (V~) 230 V~
No	COMPATIBLE WITH LOW CONSUMPTION (W) No	VERSION Single
NUMBER OF POSSIBLE ELEMENTS 1 element	MAXIMUM POWER (W) 500	NUMBER OF WIRES 3

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 6	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Included		

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-2-1:2004 | EN 60669-2-1:2004 A1:2009 | EN 60669-2-1:2004 A12:2010 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053068328

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.089

PRODUCT NET WEIGHT

0.089

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053068328

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

57

PACKAGING WIDTH

76

PACKAGING LENGTH

76

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

329232

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.09

PACKAGING NET WEIGHT

0.089

PACKAGING WEIGHT UNIT

KGM