Aluminium mini column with 2 sides for 6 elements per side and trims graphite Simon 500 Cima

REF. **52550223-033**



BASIC INFORMATION

DESCRIPTION

Mini column made in anodised aluminium and with trim in graphite of the Simon 500 Cima series. The mechanism consists of 2 sides and is for 6 elements for each one of the sides. It measures 439 x 110 x 127 mm and is in compliance with the regulation. Due to its special features, this mini column can be installed in any type of floor, either raised or concrete. In both, you will obtain an optimal result. Also, the shape of the baseboard allows integration of the mini-column with the floor trunking 85x18 mm, remember that the temperature range of installation appropriate ranges between -25 and 120 °. So that the part is kept in perfect condition for longer, do not forget to maintain it properly. It is sufficient to use a soft and dry cloth and give light passes. However, avoid abrasive cleaning products.

FINISH

Aluminium

MATERIAL

Aluminium

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

PACKAGING CONTENTS

Mini column, baseboard, lower and upper trim, non-slip adhesive foam, fixing studs, ground connection cable, screws and installation manual

ETIM CLASS

EC001941

REMARKS

The shape of the baseboard allows integration of the mini column with the 85 x 18 mm floor trunking

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
1 and 2 sides

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+120 ºC

EARTHING RESISTANCE
< 0.05 Ohms

ELECTRICAL PROPERTIES
With electrical continuity

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Constant clearance between electric wiring and Voice, Data and Multimedia cables, eliminating electromagnetic interference and possible transmission errors.

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-25 to +120 ºC

NUMBER OF MODULES
6 per side

VERSION
2 sides

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

SCREWS REQUIRED FOR FLOOR FIXING
4

REMOVAL OF TRIM FRAMES
Only with tool

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053094457

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
1.907

PRODUCT NET WEIGHT
1.907

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053094457

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
124

PACKAGING WIDTH
1423

PACKAGING LENGTH
900

PACKAGING MEASUREMENT UNIT
MMT

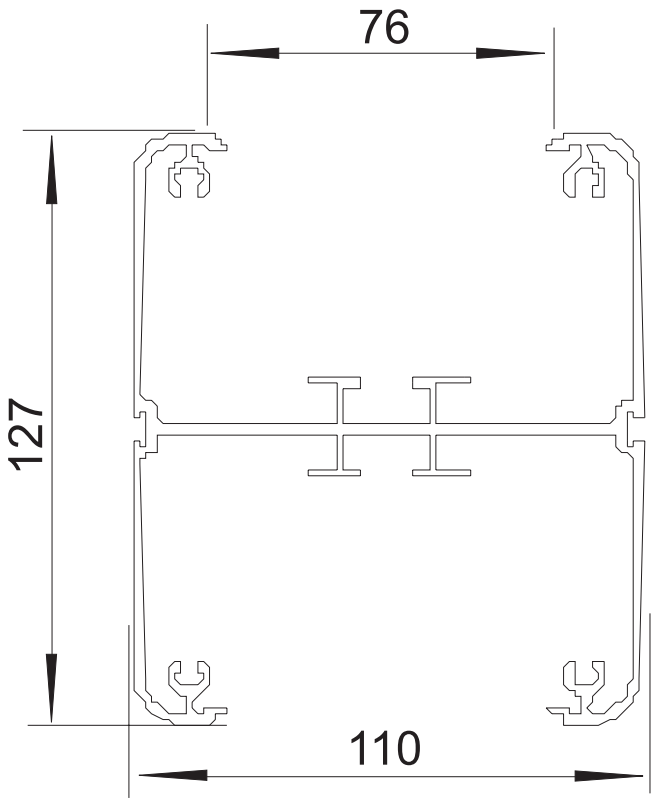
PACKAGING VOLUME
158806800

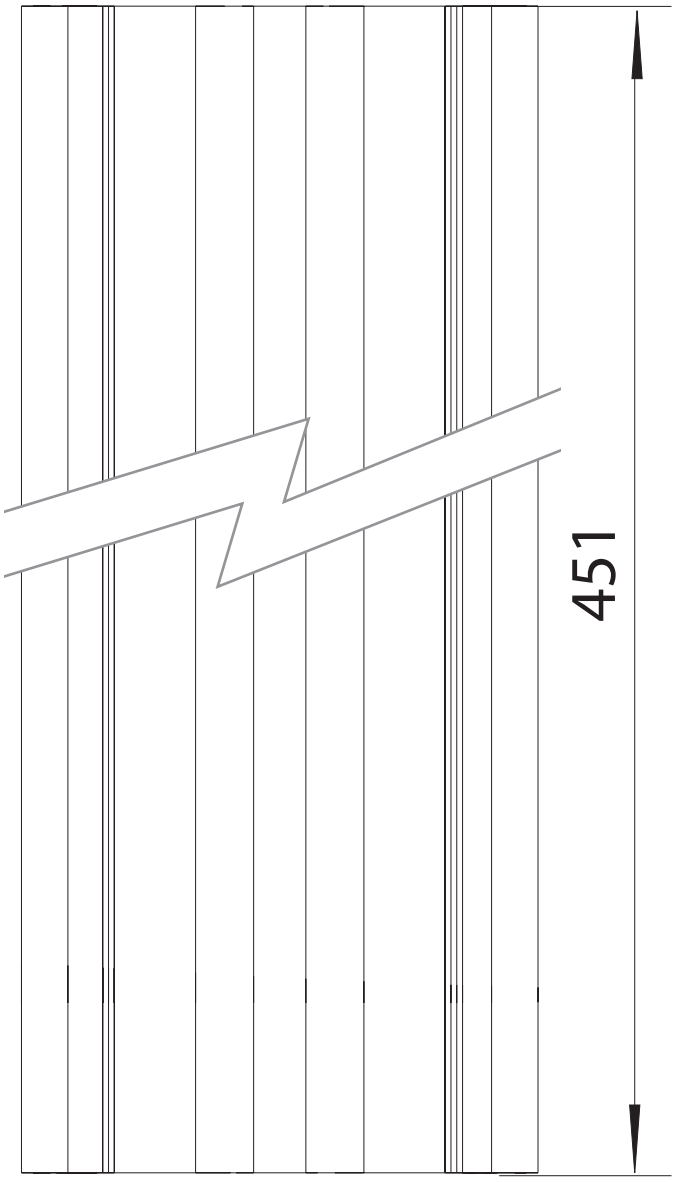
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.907

PACKAGING WEIGHT UNIT
KGM


76
127
110


451