


Card switch with 2 microswitches and light indicator 230V~ bronze Simon 270

REF. 20000550-097

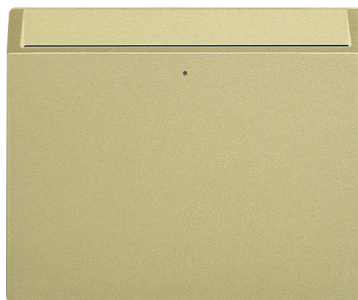

BASIC INFORMATION

FINISH

Bronze

TYPE OF ROCKER

Large

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 270 frames

PACKAGING CONTENTS

Mechanism, cover and
instruction sheet

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

Yes

OPERATING TEMPERATURE RANGE (°C)

5 - 45 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CURRENT (A)

16 A,10 (1,5 ind.) A

POWER SUPPLY (V~)

250 V~

CONSUMPTION INDICATOR (mA)

1 mA

IP RATING

IP20

RAL

3033

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

FORMAT

Fast

TYPE OF MECHANISM

Card

VERSION

1 element

FREQUENCY

50 - 60 Hz

NOMINAL VOLTAGE (V~)

250 V~

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for flush mounting

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

FastON 2.8mm

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 61058-1-2:2016 | EN IEC 63000-2-1

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053265208

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.046

PRODUCT NET WEIGHT

0.046

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053265208

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

80

PACKAGING WIDTH

55

PACKAGING LENGTH

55

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

242000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT


0

PACKAGING NET WEIGHT

0.046

PACKAGING WEIGHT UNIT

KGM

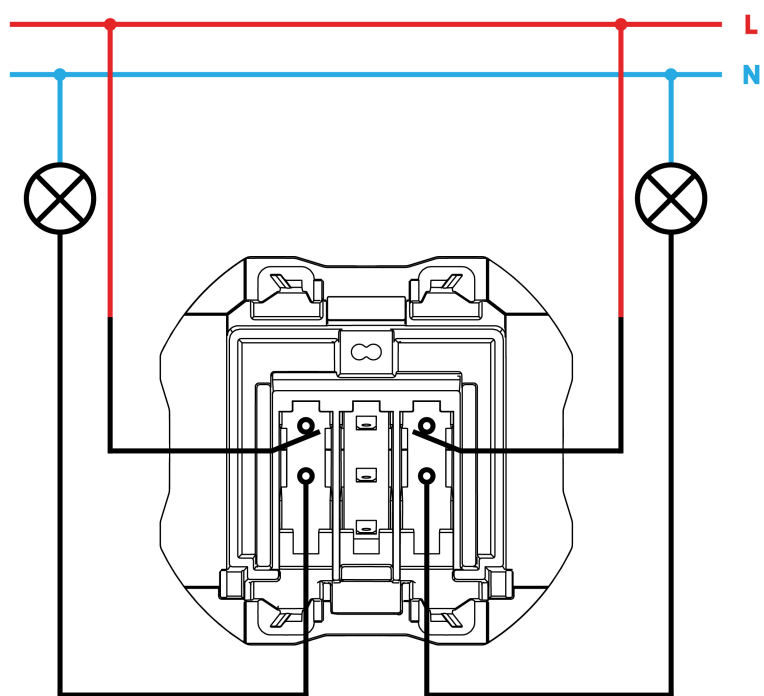

Conexión con terminal faston
Conection with faston terminal

