

880.31 Industrial Spotlight 3000 K SYM

REF. 88031038-173



BASIC INFORMATION

APPLICATION

Accent lighting, General lighting

PACKAGING CONTENTS

1 unit

ETIM CLASS

EC001744

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

CRI

70

LIGHTING EFFICIENCY (LM/W)

116 lm/W

IK CLASSIFICATION

08

DIRECTIONAL

Yes

LUMENS (LM)

5800 lm

IP RATING

IP65

DRIVER INCLUDED

Yes

LUMENS/W

5800lm/ 50W

OPERATING TEMPERATURE RANGE (°C)

40 °C maximum

L70 (°C)

100,000 h at 25 °C

OPTICS

Symmetric

POWER SUPPLY (V~)

100/240 V~

L90 (°C)

30,000 h at 25 °C

PHOTOBIOLOGICAL CLASSIFICATION

Exempt category

COLOR TEMPERATURE (K)

3000 K

LIGHT BEAM APERTURE ANGLE (°)

90°

POWER (W)

50 W


CONTROL

On/Off


COLOR TYPE

WW

PHOTOMETRY ASSETS – CONICAL

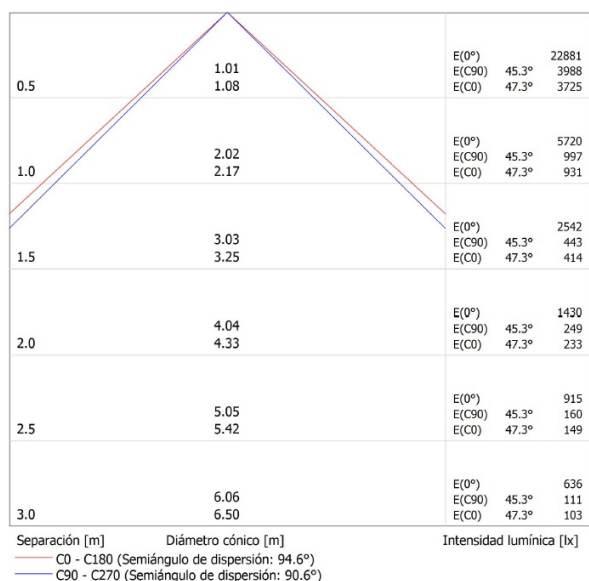

PHOTOMETRY ASSETS – POLAR

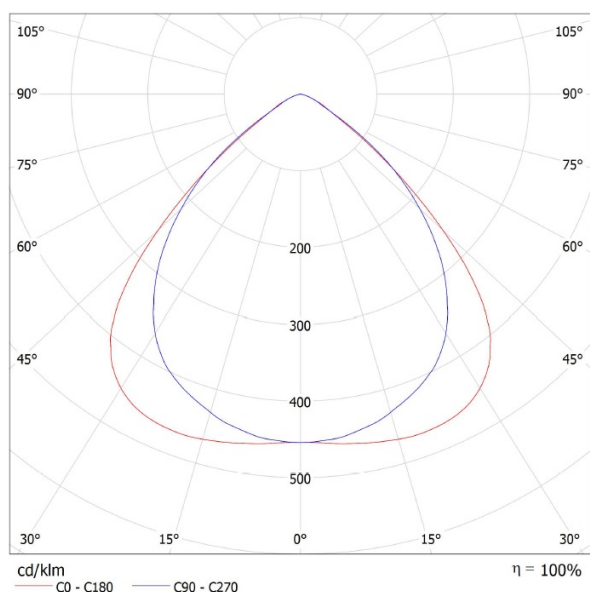

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE

Surface (with bracket)

REGULATIONS

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053205426

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053205426

PACKAGING VOLUME

5538000

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

60

PACKAGING GROSS WEIGHT

2.472

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

355

PACKAGING NET WEIGHT

2.287

UNITARY PACKAGING GROSS WEIGHT

2.472

PACKAGING LENGTH

260

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

2.287