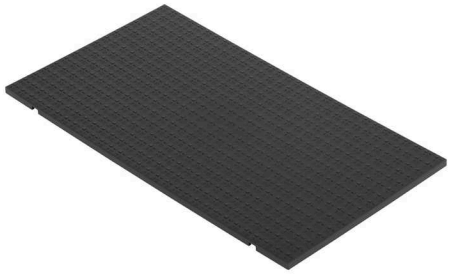
Flush-mount trim cover for adjustable floor box or service cover 12 elements graphite Simon 500 Cima

REF. **52053106-038**



BASIC INFORMATION

DESCRIPTION

The adjustable floor box of the Simon 500 Cima series is designed for installation in a very simple way in concrete floor, although it is also possible to integrate into a raised floor. The box supplied energy to a total of 12 elements or equipment and has dimensions of 225 x 310 millimetres and 76 millimetres of depth. It comes in an innovative graphite colour that will give a touch of modernity to any room of the home, office or place where it is installed. To complete the correct installation of the box you must combine it, once configured, with a plastic tray reference Simon 52052106-035. Also, if you choose to not install the same floor covering, Simon suggests complementing the set with the flush-mount trim cover reference 52053106-038. The box is manufactured with metal components with self-extinguishing and halogen-free thermoplastic insulation. This high quality material gives resistance to the product but above all, safety, because it does not contribute to flame spread in case of fire and reduces the toxicity of smoke.

FINISH

Graphite

PACKAGING CONTENTS

Trim cover

MATERIAL

Plastic

ETIM CLASS

EC002417

REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

IK CLASSIFICATION
08

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
12 modules

RAL
7021

VERSION
12 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised or concrete floor with adjustable floor boxes or service covers

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053254899

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.218

PRODUCT NET WEIGHT
0.218

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053101575

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
75

PACKAGING WIDTH
165

PACKAGING LENGTH
290

PACKAGING MEASUREMENT UNIT
MMT

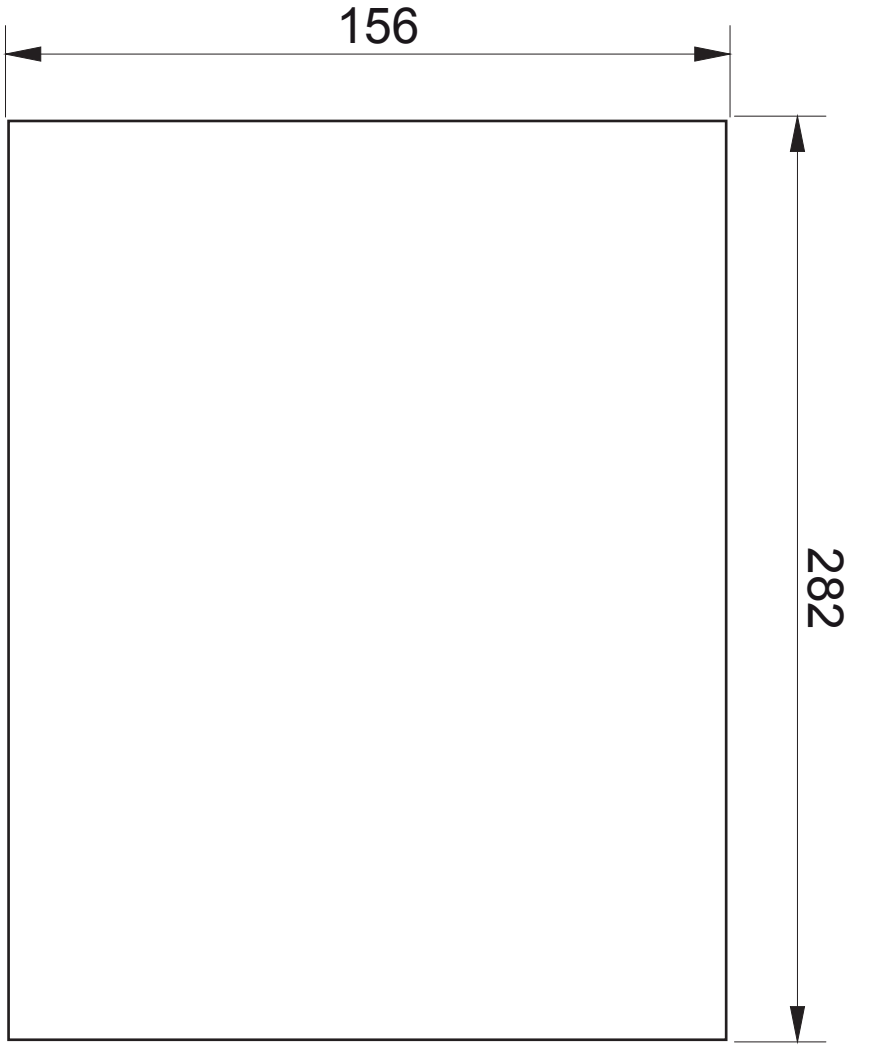
PACKAGING VOLUME
7.483

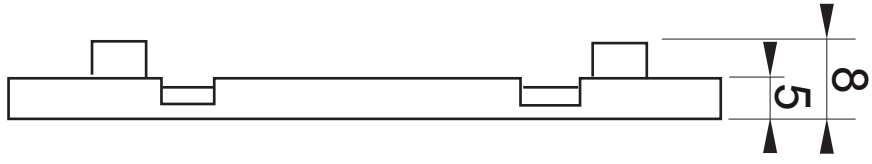
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
2.18

PACKAGING WEIGHT UNIT
KGM


156
282


8
5