


Voice and data flat plate without dust cover for 1 element for 2 Panduit® RJ45 connectors white Simon K45

REF. KB069/9

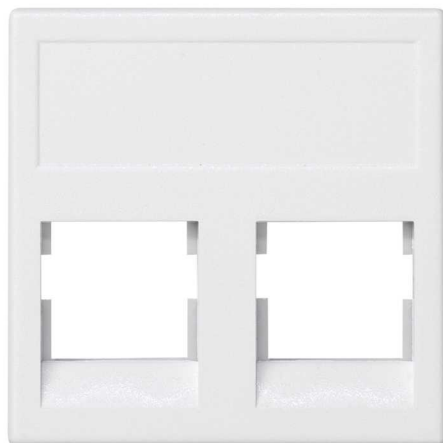

BASIC INFORMATION

DESCRIPTION

Voice and data flat plate without dust shutter. It is an element and for two RJ45 connectors, Panduit. The product is manufactured in white finish, a colour that gives simplicity and versatility. It belongs to the series Simon K45. This plate is available for both one as for two RJ45 connectors. This is the individual version, of a single module. With dimensions of 45 x 45 millimetres and a depth of 8.5 millimetres, the plate lawyer by the best materials of manufacture. These are based on the thermoplastic components, insulation, they support extreme temperatures, up to + 60 degrees centigrade. To combine the product in vertical enclosures must be resorting to 90 ° positioner Simon reference (K66). In this way it is possible to guide the flat base plate of voice and data vertically, as far as its installation is concerned, it is possible to place it on a flush mounted or surface-mounted. It is worth noting that does not require much maintenance, only the use of cloths dry and soft for cleaning.

FINISH

White

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-030)

PACKAGING CONTENTS

Flat voice and data plate without dust cover

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90° positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

DUST SHUTTER

No

NUMBER OF MODULES

Half

AVAILABLE IN

Plate for 1 and 2 RJ45 connectors

FORMAT

RJ45

PLATE TYPE

Flat

COMPATIBLE WITH CONNECTORS

Panduit® Mini-Com Series.

IP RATING

IP20

RAL

9003

RJ45 CONNECTORS

Not included in voice and data plate

KIT AVAILABILITY

No

RJ45 ADAPTOR MODULE

Included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT RJ45 PLATES

Panduit® RJ45 connectors

SNAP-FIT TYPE

Panduit® RJ45 connectors

DUST PROTECTION

No

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

VERSION

Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-030)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.012

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

911400

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436025271

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0.3

UNITS CONTAINED PACKAGING

20

PACKAGING GROSS WEIGHT

0.24

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING HEIGHT

70

PACKAGING NET WEIGHT

0.24

UNITARY PACKAGING GROSS WEIGHT

0.012

PACKAGING WIDTH

93

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

140