


Voice and data angled plate without dust cover 1 element for 2 fibre optics connectors SC simplex white Simon K45

REF. KB74/9

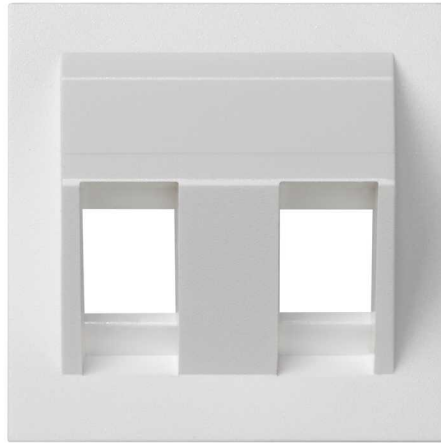

BASIC INFORMATION

DESCRIPTION

Plate of voice and data plate without dust cover and of an element, it is suitable for two connectors of fiber optics SC simple. This plate is white finish and is part of the series Simon K45. The dimensions of the plate Simon K45 voice and data make it very compact, to be inclined. Specifically measures 45x45 mm and has a depth of 25 millimetres. It is manufactured in thermoplastic material, insulation. These components, they bet for the maximum quality to prevent the propagation of possible fires, so also avoiding the smoke toxic to high temperatures. The angled plate Simon K45 voice and data can work at temperatures variables (between -5 and + 60 degrees), and it is possible to install it on a surface-mounted or recessed. For its maintenance it is necessary to avoid the use of aggressive cleaners that carry chemical, such as chlorine. Inclined plates favor a good bending radius in the data installations. Are perfect for environments labor, training rooms, libraries, offices, etc. From easy installation and modern design.

FINISH

White

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-030)

PACKAGING CONTENTS

Angled voice and data plate without dust cover

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90° positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

FORMAT

RJ45

RAL

9003

AVAILABLE IN

Plate for 2 SC simplex fibre optic connectors

IP RATING

IP20

RJ45 ADAPTOR MODULE

Direct snap-fit of the connectors on the voice and data plate

RJ45 CONNECTORS

Not included in voice and data plate

KIT AVAILABILITY

No

SNAP-FIT RJ45 PLATES

SC simplex fibre-optic connectors

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

SNAP-FIT TYPE

SC simplex fibre-optic connectors

DUST PROTECTION

No

NUMBER OF MODULES

Half

VERSION

Single

DUST SHUTTER

No

PLATE TYPE

Angled

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-030)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

UNE-EN 60.670-1:2006

LOGISTICS INFORMATION

UNITARY EAN CODE

8426436025813

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

45570

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.011

PRODUCT NET WEIGHT

0.011

UNITARY PACKAGING WEIGHT UNIT

KGM

UNITS CONTAINED PACKAGING

20

PACKAGING HEIGHT

70

PACKAGING WIDTH

93

PACKAGING LENGTH

140

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

911400

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.22

PACKAGING NET WEIGHT

0.22

PACKAGING WEIGHT UNIT

KGM