Service cover for 2 elements for installation in concrete or raised floor grey Simon 500 Cima

REF. **52054101-035**



BASIC INFORMATION

DESCRIPTION

The service cover for 2 elements in Grey of the collection Simon 500 Cima, it is suitable for installation in concrete floor or raised floor, guaranteeing the versatility of the product in any type of space. With 2 modules and capacity for 2 elements, the service cover is manufactured in self-extinguishing halogen-free thermoplastic reaches a temperature range of -5 ºC and 60 ° C and a maximum of 90 ºC. The service cover is compatible with voice and data connectors copper and fiber optics and add solutions for multimedia connections. The collection 500 Cima in inspection covers, protects the elements of the entry of dust or other objects, making the access to the indoor of the installation and the passage of cabling from raised floor or pavement. Your design integrates seamlessly into each space, giving maximum functionality and security.

FINISH

Grey

PACKAGING CONTENTS

Service cover and installation manual

ETIM CLASS

EC001903

MATERIAL

Plastic

REMARKS

Once the product has been installed, you have the option to combine it with the flush-mount trim cover (ref.52053101-035) in cases where you do not install the same floor covering.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
2 modules

RAL
7011

RECESS DIMENSION (MM)
170 x 115 mm

VERSION
2 elements

INSTALLATION AND MAINTENANCE

CLAW RANGE OF OPERATION (MM)
Between 14 and 54 mm

NUMBER OF COVER OPENING POSITIONS
2

REMOVAL OF COVER
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using fastening claws on the concrete floor tray or the raised floor tile (provided in the service cover)

CAN BE INSTALLED IN TRAY
Plástica

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised floor and concrete floor

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053101582

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.55

PRODUCT NET WEIGHT

0.55

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053101582

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

95

PACKAGING WIDTH

155

PACKAGING LENGTH

195

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

2.871

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

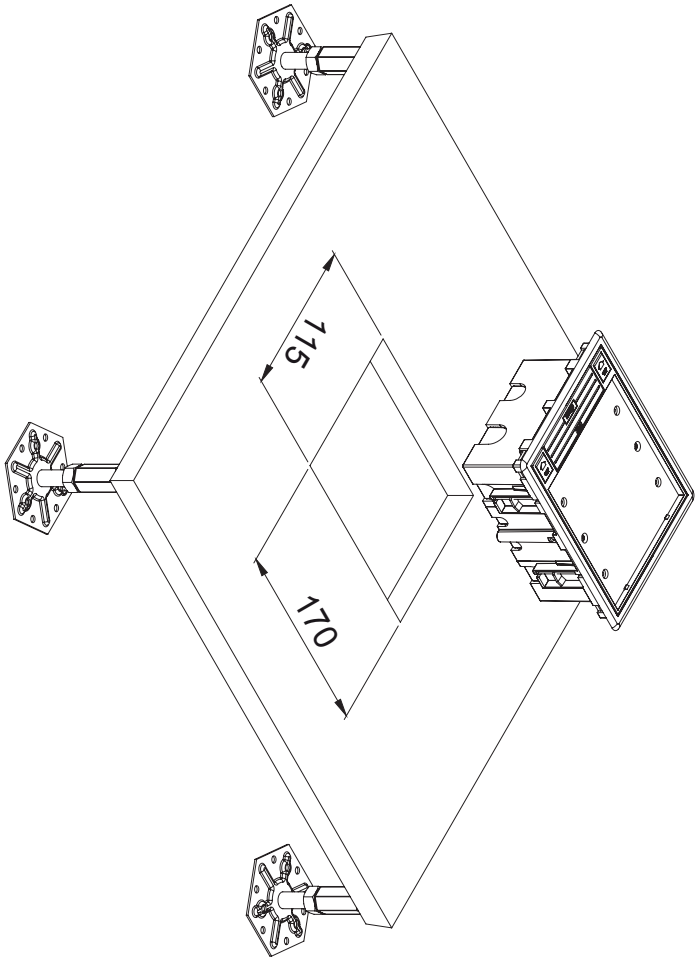
0

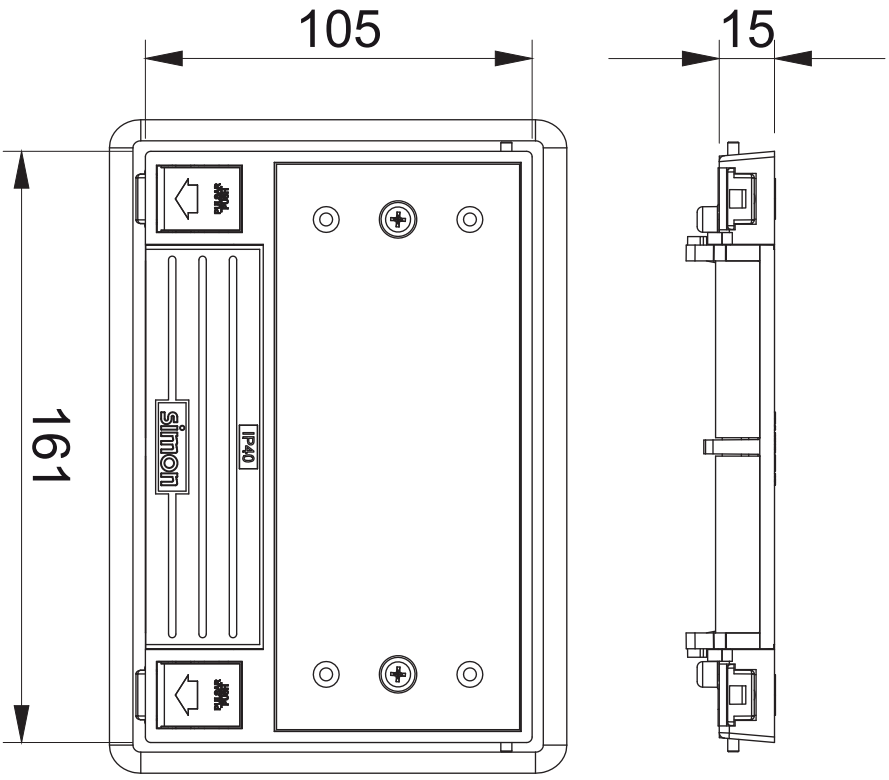
PACKAGING NET WEIGHT

0.55

PACKAGING WEIGHT UNIT

KGM


175
170


105
15
161
simon
IP40