

Downlight 735.20 WW Extensive 1-10 V Black

REF. 73520138-783



BASIC INFORMATION

APPLICATION

Accent lighting, General lighting

PACKAGING CONTENTS

1 unit

ETIM CLASS

EC001744

TECHNICAL INFORMATION

IP RATING

IP20

DRIVER INCLUDED

Yes

LUMENS/W

2200 lm/22W

OPERATING TEMPERATURE RANGE (°C)

Max. temp.: 35°C

L70 (°C)

50,000 h

OPTICS

Extensive

COLOR TEMPERATURE (K)

3000 K

L90 (°C)

50,000 h at 25 °C

PHOTOBIOLOGICAL CLASSIFICATION

Exempt category

CONTROL

1-10 V

COLOR TYPE

WW

POWER (W)

22 W

CRI

80

LIGHTING EFFICIENCY (LM/W)

100 lm/W

SERVICE LIFE

50.000 h

LUMENS (LM)

2200 lm


PHOTOMETRY ASSETS – CONICAL

0.5	0.88 0.90	E(0°) E(C90) E(C0)	41.3° 41.9°	4793 1292 1218
1.0	1.76 1.79	E(0°) E(C90) E(C0)	41.3° 41.9°	1198 323 304
1.5	2.64 2.69	E(0°) E(C90) E(C0)	41.3° 41.9°	533 144 135
2.0	3.51 3.59	E(0°) E(C90) E(C0)	41.3° 41.9°	300 81 76
2.5	4.39 4.49	E(0°) E(C90) E(C0)	41.3° 41.9°	192 52 49
3.0	5.27 5.38	E(0°) E(C90) E(C0)	41.3° 41.9°	133 36 34

Separación [m] Diámetro cónico [m] Intensidad luminica [lx]

— C0 - C180 (Semiángulo de dispersión: 83.8°)
— C90 - C270 (Semiángulo de dispersión: 82.6°)

PHOTOMETRY ASSETS – POLAR

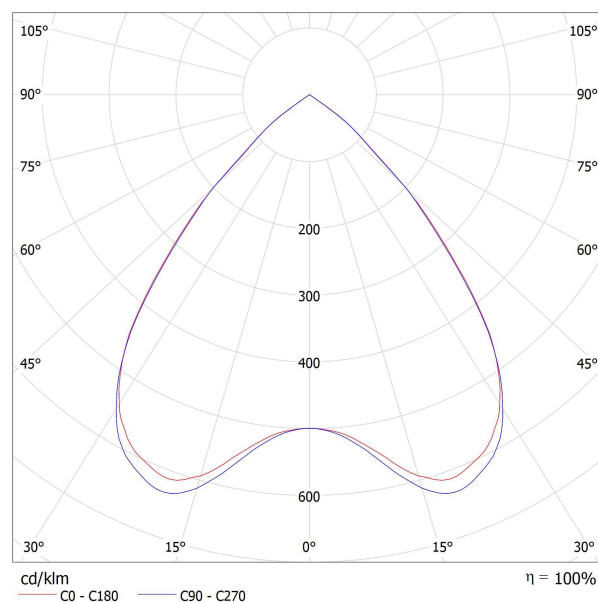

INSTALLATION AND MAINTENANCE

INSTALLATION ALTERNATIVES

Surface-mounted

INSTALLATION TYPE

Flush-mounted

REGULATIONS

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053285381

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053285381

PACKAGING VOLUME

9811125

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

135

PACKAGING GROSS WEIGHT

1.5

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

285

PACKAGING NET WEIGHT

1.2

UNITARY PACKAGING GROSS WEIGHT

1.5

PACKAGING LENGTH

255

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

1.2