
# 90º positioner for vertical positioning of the plates for 1 element Simon K45

REF. **K66**

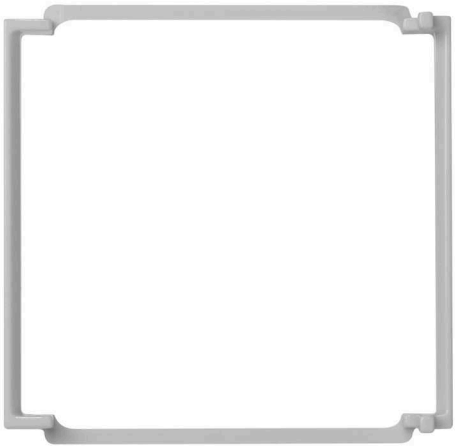

# BASIC INFORMATION

## DESCRIPTION

The Brand Simon through Simon Connect and its Simon K45 range, offering solutions for all types of installations, allows you absolute compatibility with the rest of the connectors on the market, and is a long term solution for your connectivity needs. If necessary the correct inclination of the placed plates, Simon offers you this complement that places the housings in the correct position. In accordance with rigorous safety standards, not only for people, but also for the Voice, Data and Multimedia equipment, which are installed with the K45 range. This is the additional 90 ° positioner for placing the plates of Simon K45 of 1 element in a vertical position. Finished in grey. Thermoplastic material fireproof. Allows you to adapt the voice and data plate in vertical housing (K45 TELEBLOCK, mini columns K45, K45 columns and mechanism holder trunking direct snap-fit K45 installed in vertical position) to correct the orientation of the plates. Dimensions 43,5 x 44,5 x 13 mm halogen-free thermoplastic that guarantees no flame propagation in case of fire and low toxicity in case of smoke. It meets strict safety standards: UNE-EN 60669-1:2002 + A1:2003 + A2:2009. Suitable for surface mounting and flush mounting. It withstands extreme temperatures (-5 to +60 °C).

## FINISH

Grey

## COMPATIBILITY

Simon K45 voice and data plates

## ETIM CLASS

EC002649

## MATERIAL

Plastic

## PACKAGING CONTENTS

90º positioner for placing the plates vertically

## REMARKS

Enables the voice and data plates to be adapted to vertical enclosures (K45 Teleblock, K45 mini columns; K45 columns and K45 direct snap-fit mechanism-holder trunking installed vertically) to correct the orientation of the plates.

## TECHNICAL INFORMATION

### AVAILABLE MARKET
CE

### MAX TEMP DURING CONSTRUCTION WORK (°C)
+60° C

### INDICATOR FUNCTION
No

### IP RATING
IP20

### KIT AVAILABILITY
Yes

### MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60° C

### RAL
7035

## INSTALLATION AND MAINTENANCE

### TYPE OF FASTENING
Fixing by direct snap-fit, no tools needed

### INSTALLATION DIRECTION
Vertical according to the direction of the mechanisms

### INSTALLATION TYPE
Suitable for surface and flush mounting

## REGULATIONS

### REGULATIONS
Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60670-1:2005

## LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0.3

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.003

PRODUCT NET WEIGHT
0.003

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436036956

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
65

PACKAGING WIDTH
70

PACKAGING LENGTH
100

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
455000

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.06

PACKAGING WEIGHT UNIT
KGM