

Monoblock push-button switch IP55 10A 250V~ with fast terminal connection system grey Simon 44 Aqua

REF. 4490150-035



BASIC INFORMATION

DESCRIPTION

With measures of 84x75 mm, the individual monoblock push-button switch, IP55 of the series Simon 44 Aqua has a tilting quick terminal connection system and is available in grey colour, in addition to being compatible with elements up to 250 V of voltage and 10 A of intensity, it is made of metal components with halogen-free insulation and trim in thermoplastic of the best quality, ensuring maximum security in those environments exposed to the environmental conditions. Thanks to the IP55 protection against the accumulation of dirt, protect you any mechanism that is displayed at the air. And is that the series Simon 44 Aqua is the ideal solution for use in terraces, gardens and swimming pools or sports facilities, among others, a collection designed to adapt to the inclement weather.

FINISH

Grey

COMPATIBILITY

Simon 27 mechanisms

ETIM CLASS

EC000029

MATERIAL

Thermoplastic

PACKAGING CONTENTS

Mechanism, socket and frame with rocker

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 A	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP55	RAL 7035
NUMBER OF POSSIBLE ELEMENTS 1 element	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
IK CLASSIFICATION 07	TYPE OF MECHANISM Pivoting	VERSION Single
INDICATOR FUNCTION No	MONOBLOCK Yes	VOLTAGE (V~) 250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	INSTALLATION DIRECTION Vertical	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast
	INSTALLATION TYPE Suitable for surface mounting	

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018*1 | IEC 60884-1 Ed. 3.2*2 | UNE 20315-1-1:2017*2 | UNE 20315-1-2:2017*2 | EN IEC 60670-1:2021 + A11:2021*3 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING MEASUREMENT
UNIT
MMT

UNITARY PACKAGING WIDTH
0

PACKAGING EAN
8421053069868

PACKAGING VOLUME
4.079

UNITARY PACKAGING LENGTH
0

UNITS CONTAINED PACKAGING
10

PACKAGING VOLUME UNIT
DMQ

UNITARY PACKAGING VOLUME
0

PACKAGING HEIGHT
86

PACKAGING GROSS WEIGHT
0

UNITARY PACKAGING GROSS
WEIGHT
0.145

PACKAGING WIDTH
155

PACKAGING NET WEIGHT
1.45


PRODUCT NET WEIGHT
0.145

PACKAGING LENGTH
306


PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interrupor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

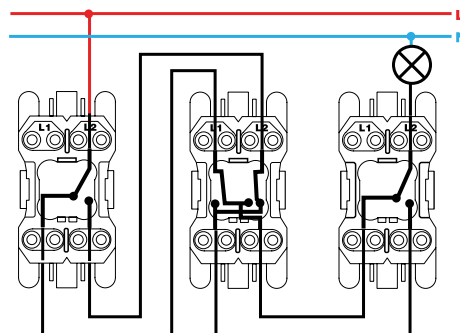


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches




Interrupor unipolar / Single-pole switch
XX00102-XX




Interrupor bipolar / Double pole switch
XX00134-XX

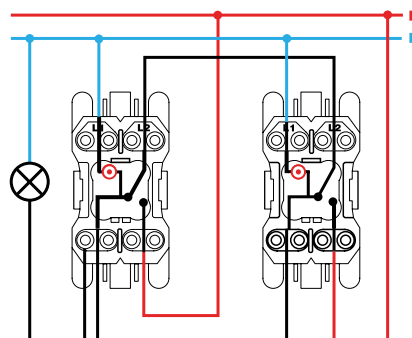


Conmutador / 2-way switch
XX00202-XX




Interrupor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

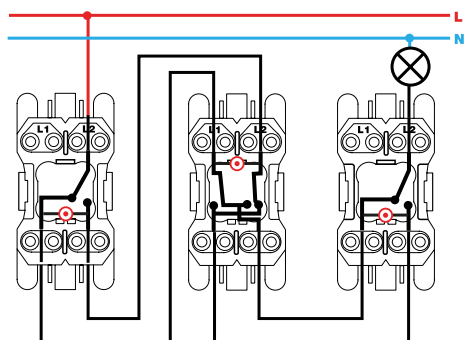

Conmutador cruce / Intermediate switch
XX2700254-XX