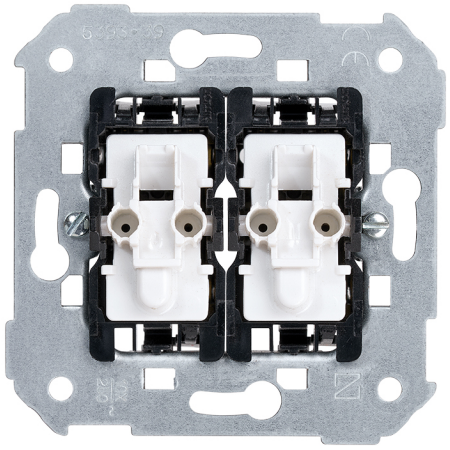
Group of 2 push buttons 10 A 250V~ with integrated light indicator and quick terminal connection system Simon 75

REF. **75393-39**



BASIC INFORMATION

DESCRIPTION

Group of 2 push buttons with built-in light indicator and quick terminal connection system. For 10A and 250V.

It belongs to the control mechanism category of the Simon 75 series and is suitable for both flush-mounted and surface installation.

Note that the cable section it accommodates is from 1.5 mm to 2.5 mm and the required cable stripping for successful connection is 15 mm.

The consumption of the light indicator is 1 mA. These mechanisms can also be mounted on the Simon 82 series.

The Simon 75 Collection offers numerous functions that provide comfort and safety, while also offering a wide range of options to conveniently equip each space. Different colors in the same frame create numerous possibilities to form the ideal set that best meets the various needs of each installation.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)
1 mA

NUMBER OF CONTACTS
4

NUMBER OF POSSIBLE ELEMENTS
1 element

FREQUENCY
50 Hz

INDICATOR FUNCTION
Yes

CURRENT (A)
10 A

IP RATING
IP20

LINKABLE
No

TYPE OF MECHANISM
Pivoting

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

RECESS DIMENSION (MM)
30

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Double

VOLTAGE (V~)
250 V~

NUMBER OF WIRES
4

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

REMOVAL OF COVER
Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-1:2018|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255988

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

3026595

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.073

PRODUCT NET WEIGHT

0.073

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053036617

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

82

PACKAGING WIDTH

165

PACKAGING LENGTH

223

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

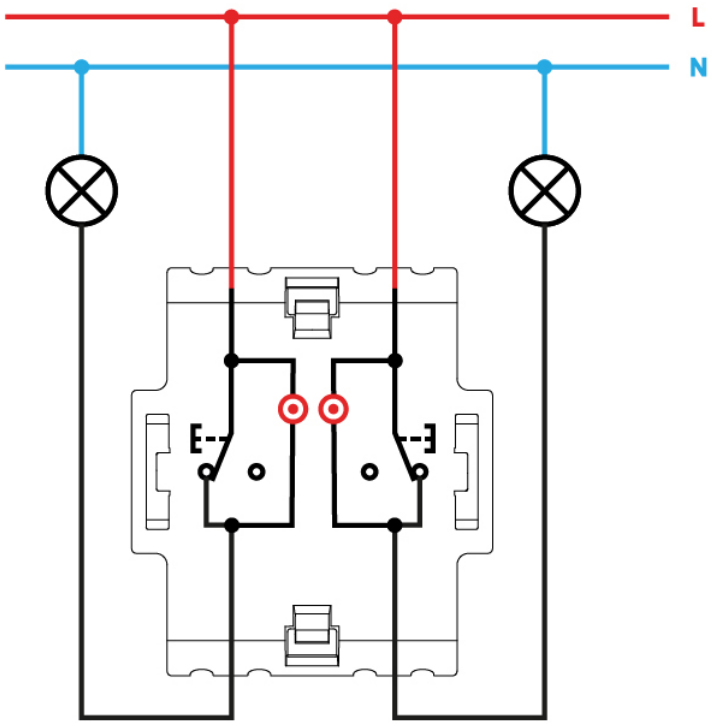
0.725

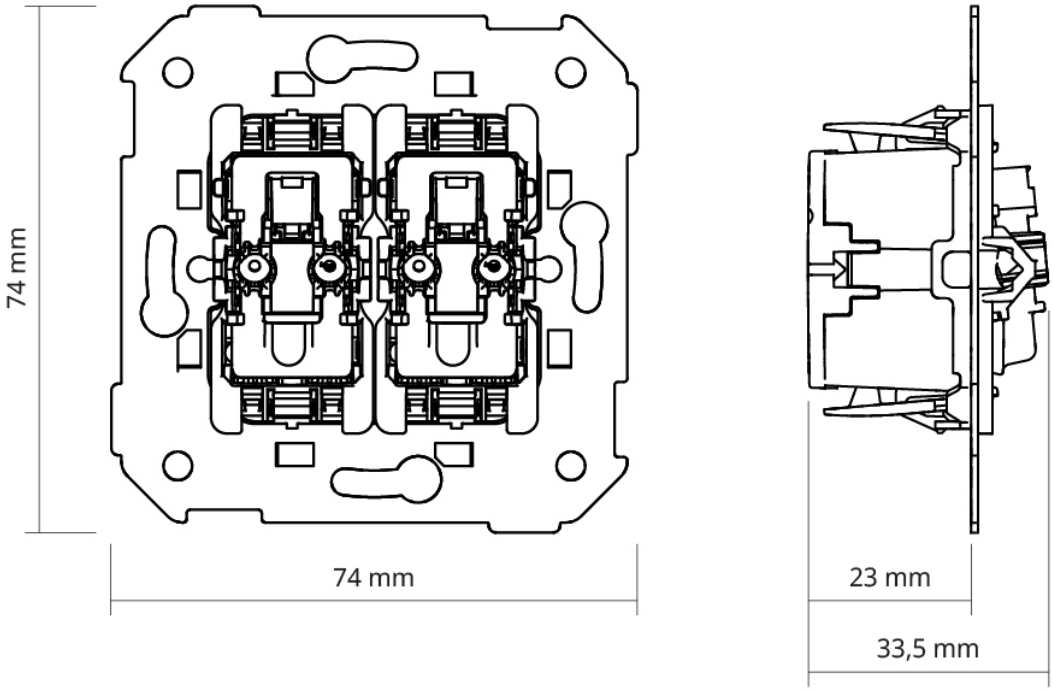
PACKAGING NET WEIGHT

0.73

PACKAGING WEIGHT UNIT

KGM


L
N


74 mm
74 mm
23 mm
33,5 mm