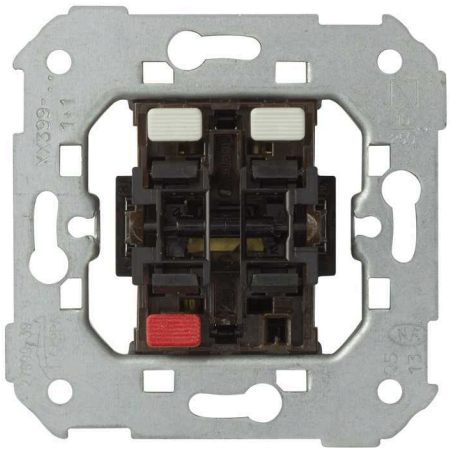
Group of 2 push buttons 10 A 250V~ (1 input + 2 outputs) with quick terminal connection system Simon 75

REF. **75399-39**



BASIC INFORMATION

DESCRIPTION

Group of 2 push buttons 10 A 250 V~ (1 input + 2 outputs) Simon 75 with quick connection system, designed for the operation of control circuits with a common input and two independent outputs. It allows precise control of lighting and auxiliary systems in residential and professional installations, offering a rated intensity of 10 A at 250 V~ 50 Hz. It incorporates an insertion connection system that facilitates a quick and safe installation, accepting conductors from 1.5 to 2.5 mm^2 with a strip length of 11 mm. Its tilting operation ensures reliable and durable functioning under frequent use. Made with metallic components and halogen-free thermoplastic insulation, in accordance with EN 60669-1 standards and European directives LVD and RoHS, it ensures safety, resistance, and compatibility with the Simon 75 series and compatible frames.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF CONTACTS
3

NUMBER OF POSSIBLE ELEMENTS
1 element

FREQUENCY
50 Hz

INDICATOR FUNCTION
No

CURRENT (A)
10 A

IP RATING
IP21

LINKABLE
No

TYPE OF MECHANISM
Pivoting

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

RECESS DIMENSION (MM)
30

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Double

VOLTAGE (V~)
250 V~

NUMBER OF WIRES
6

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

REMOVAL OF COVER
Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053256053

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
3026595

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.062

PRODUCT NET WEIGHT
0.062

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053029374

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
83

PACKAGING WIDTH
165

PACKAGING LENGTH
221

PACKAGING MEASUREMENT UNIT
MMT

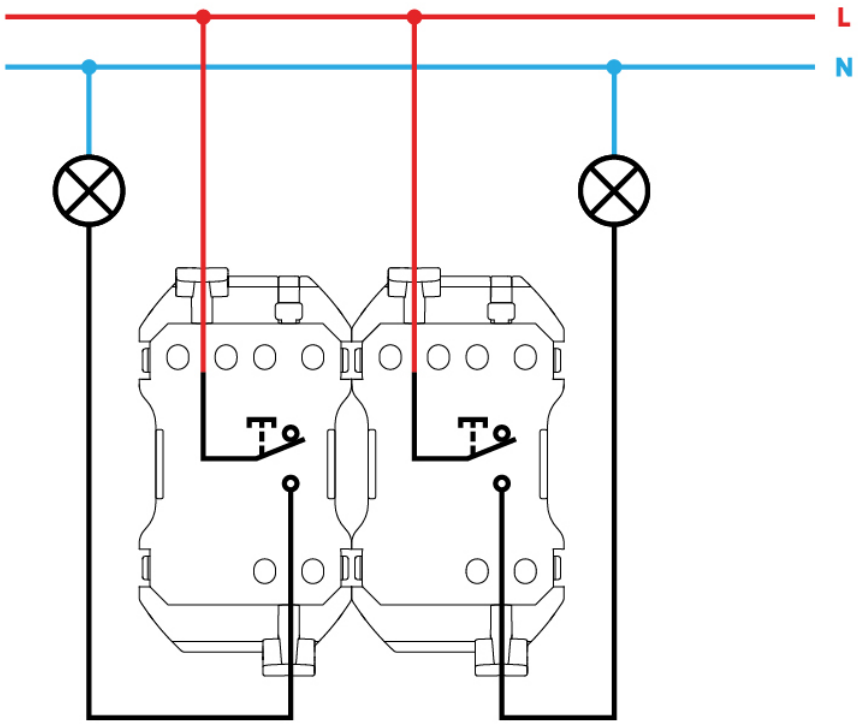
PACKAGING VOLUME
3026595

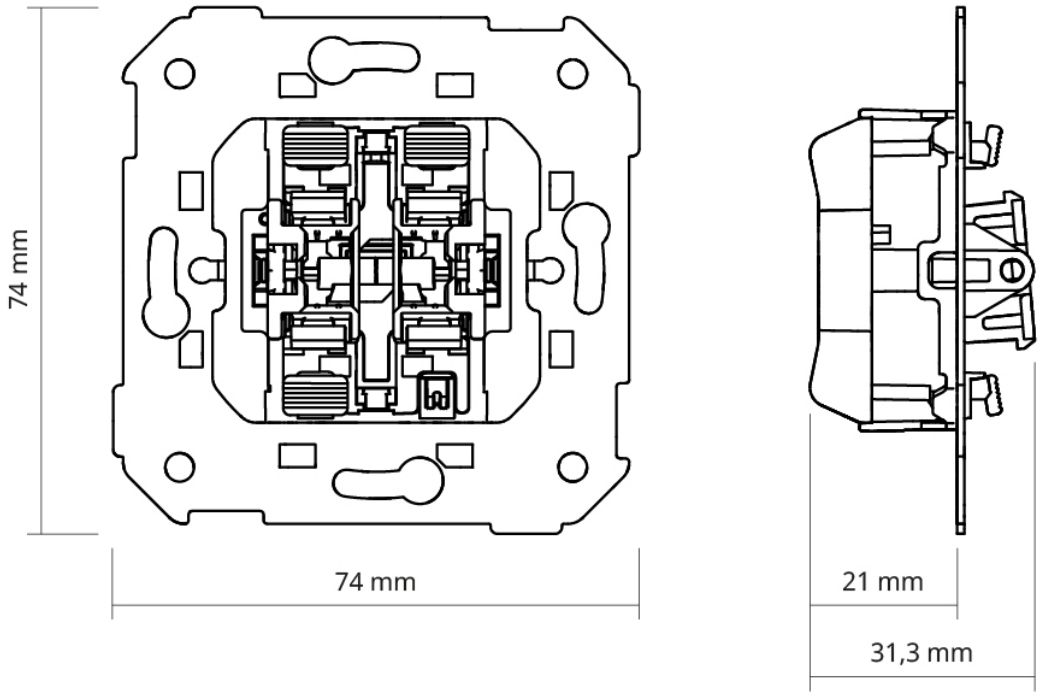
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.745

PACKAGING NET WEIGHT
0.62

PACKAGING WEIGHT UNIT
KGM


L
N


74 mm
74 mm
21 mm
31,3 mm