
Rocker with viewer for switch with pilot light for 1 element white Simon K45

REF. **K115/9**

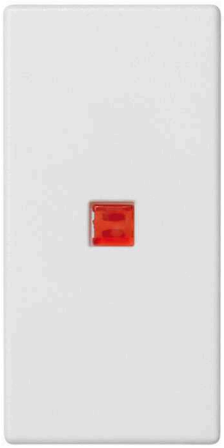

BASIC INFORMATION

DESCRIPTION

With the versatility of in white finishes that combine with all kinds of environments, the rocker with viewer for 2-way switch of the collection Simon 45, achieved innovation, the perfect balance between functionality and design. The rocker with viewer in this range, includes pilot light to indicate whether the load on which acts is on or off. However, it is not possible to combine 2 narrow rocker for control mechanisms with in a adaptor plate Simon 500 Cima-Simon 45. It is made up of halogen-free thermoplastic, to protect the room of the flame spread and toxicity by smoke in case of fire. It can reach temperatures of more than 60 ° C, with recommended installation from -5 to 60 °C. It has a size of 45 x 22.5 mm and a depth of 10 mm, and is designed for an installation both recessed and surface-mounted and includes signaling function for beacon the mechanism and place it into moments of a low lighting.

FINISH

White

MATERIAL

Plastic

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-030)

PACKAGING CONTENTS

Rocker and installation manual

ETIM CLASS

EC000011

REMARKS

It is not possible to combine 2 narrow button control mechanisms on a Simon 500 Cima-Simon K45 adapter plate

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

Quarter and half module versions

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

INDICATOR FUNCTION

Yes

IP RATING

IP20

KIT AVAILABILITY

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

NUMBER OF MODULES

Four

RAL

9003

VERSION

Single

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER

Only with tool

TYPE OF FASTENING

Fixing by direct snap-fit, no tools needed

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-030)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2:2008

LOGISTICS INFORMATION

UNITARY EAN CODE
8426436047198

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0.3

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.006

PRODUCT NET WEIGHT
0.006

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436047198

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
72

PACKAGING WIDTH
72

PACKAGING LENGTH
105

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
544320

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.62

PACKAGING NET WEIGHT
0.06

PACKAGING WEIGHT UNIT
KGM