

Socket 2P+T with safety 15A 127V~ aluminum Simon 82

REF. 82422-63



BASIC INFORMATION

FINISH

Aluminium

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)

3,3 mm

CURRENT (A)

15 A

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VOLTAGE (V~)

127 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY
(MM)

11

TYPE OF TERMINAL
CONNECTION - FUNCTION 1

Screw

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

22.8

UNITARY PACKAGING GROSS
WEIGHT

52.5

PACKAGING LENGTH

227

UNITARY PACKAGING WIDTH

39

PRODUCT NET WEIGHT

31.25

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING LENGTH

55

UNITARY PACKAGING WEIGHT
UNIT

GRM

PACKAGING VOLUME

1.451

UNITARY PACKAGING
MEASUREMENT UNIT

MMT

PACKAGING EAN

7506020304973

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING VOLUME

0.049

UNITS CONTAINED PACKAGING

24

PACKAGING GROSS WEIGHT

0.75

UNITARY PACKAGING VOLUME
UNIT

DMQ

PACKAGING HEIGHT

46

PACKAGING NET WEIGHT

750

PACKAGING WIDTH

139

PACKAGING WEIGHT UNIT

KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO


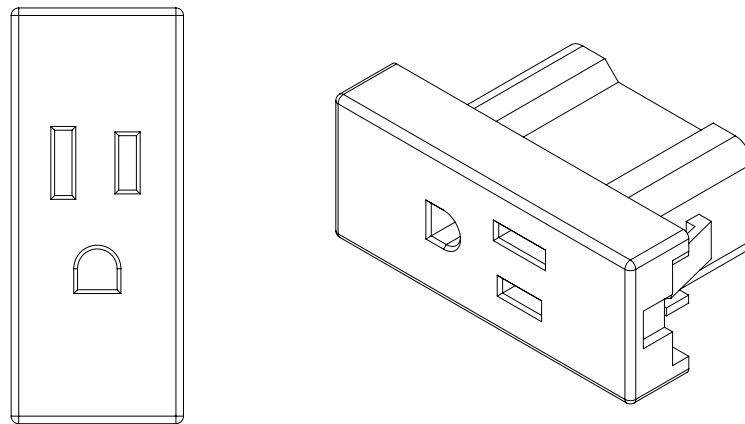


DIAGRAMA DE MONTAJE



*Placa y chasis NO incluidos

DIAGRAMA DE CONEXIÓN

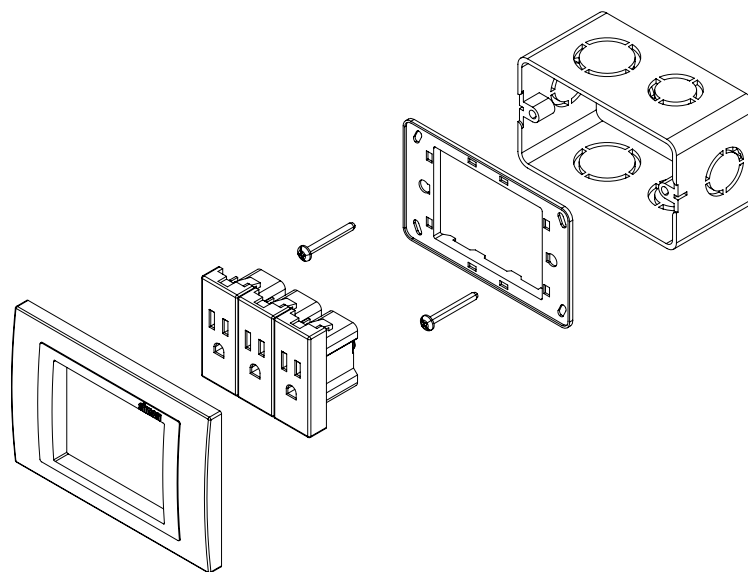