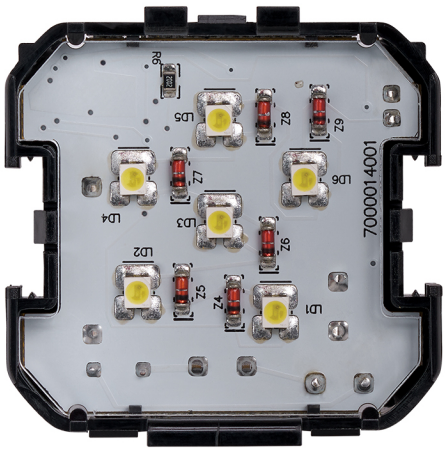
Courtesy beacon composed of LEDs Simon 75

REF. **75370-39**



BASIC INFORMATION

DESCRIPTION

The courtesy beacon made of LEDs, from the extensive range of Simon 75 products. For its proper functioning, it must be connected to a power supply of 250 V~, please note that the allowable cable gauge is from 1.5 to 2.5 mm, it comes with 6 mm of stripped cable and the luminous beam is 11 lux. For its installation, it will be enough to place the beacon on the surface or apply pressure. The material it is made from is based on metal components with halogen-free thermoplastic insulation, capable of reaching temperatures ranging between 0 and 40º, and can withstand a maximum of between -20º minimum and 75º C maximum. It complies with all safety systems according to the current UNE-EN 61000-3-3:2009 regulation.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82

PACKAGING CONTENTS

Courtesy light and instruction sheet

ETIM CLASS

EC000064

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

COMPATIBLE 12V AC/DC
Yes

COMPATIBLE 230V AC/DC
Yes

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF CONTACTS
2

NUMBER OF POSSIBLE ELEMENTS
1 element

FREQUENCY
50 Hz

INDICATOR FUNCTION
Yes

CURRENT (A)
0,12 A

IP RATING
IP20

LIGHT BEAM
Yes

LINKABLE
Yes

MAXIMUM QUANTITY PER CIRCUIT
No limitation

NOMINAL VOLTAGE (V~)
230 V~

OPERATING TEMPERATURE RANGE (°C)
0 - 40 °C

POWER SUPPLY (V~)
12/230 Vac/dc

REAR INPUT VIA TERMINALS
Yes

RECESS DIMENSION (MM)
35

STORAGE TEMPERATURE RANGE (°C)
-20 - 75 °C

VERSION
Single

NUMBER OF WIRES
2

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
6

CLAW
Not possible

REMOVAL OF COVER
Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

REGULATIONS

REGULATIONS
UNE-EN 61000-3-3:2009

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053068915

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
267325

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.05

PRODUCT NET WEIGHT
0.05

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053068915

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
85

PACKAGING WIDTH
37

PACKAGING LENGTH
85

PACKAGING MEASUREMENT UNIT
MMT

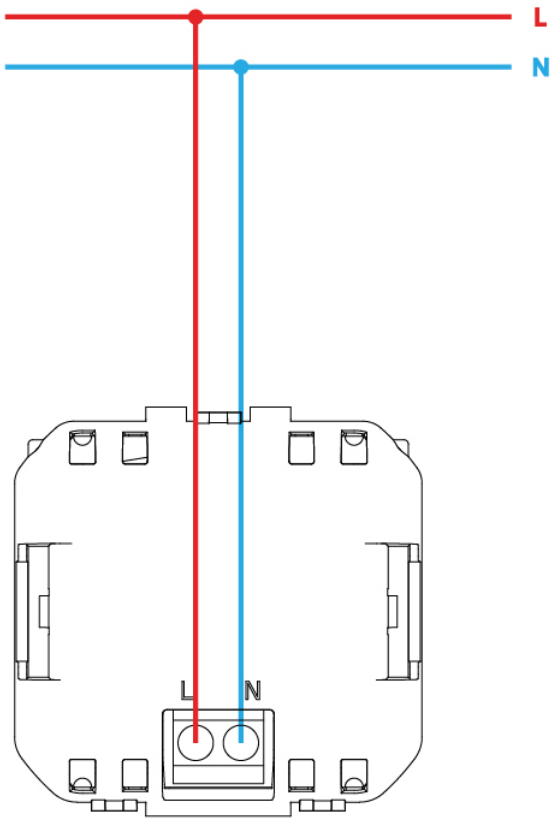
PACKAGING VOLUME
267.325

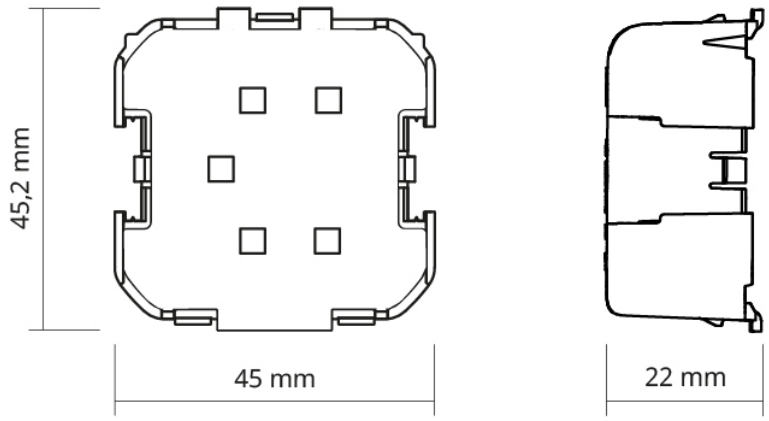
PACKAGING VOLUME UNIT
CMQ

PACKAGING GROSS WEIGHT
0.045

PACKAGING NET WEIGHT
0.05

PACKAGING WEIGHT UNIT
KGM


L
N
L
N


45,2 mm
45 mm
22 mm