

Bell push button with viewer 16A 127V graphite Simon 25 Plus

REF. 25160-38



BASIC INFORMATION

FINISH

Graphite

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)

3,3 mm

CURRENT (A)

16 A

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VOLTAGE (V~)

127/220 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY
(MM)

11

TYPE OF TERMINAL
CONNECTION - FUNCTION 1

Fast

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

22.2

UNITARY PACKAGING GROSS
WEIGHT

19.12

PACKAGING LENGTH

224

UNITARY PACKAGING WIDTH

42.5

PRODUCT NET WEIGHT

16

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING LENGTH

41.2

UNITARY PACKAGING WEIGHT
UNIT

GRM

PACKAGING VOLUME

0.857

UNITARY PACKAGING
MEASUREMENT UNIT

MMT

PACKAGING EAN

7506020301071

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING VOLUME

0.039

UNITS CONTAINED PACKAGING

20

PACKAGING GROSS WEIGHT

0.366

UNITARY PACKAGING VOLUME
UNIT

DMQ

PACKAGING HEIGHT

45

PACKAGING NET WEIGHT

320

PACKAGING WIDTH

85

PACKAGING WEIGHT UNIT

KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO


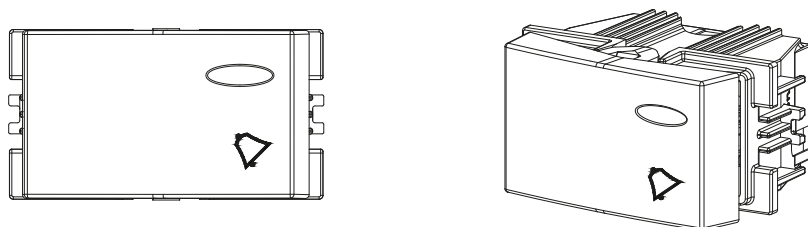


DIAGRAMA DE MONTAJE



*Placa y chasis NO incluidos

DIAGRAMA DE CONEXIÓN

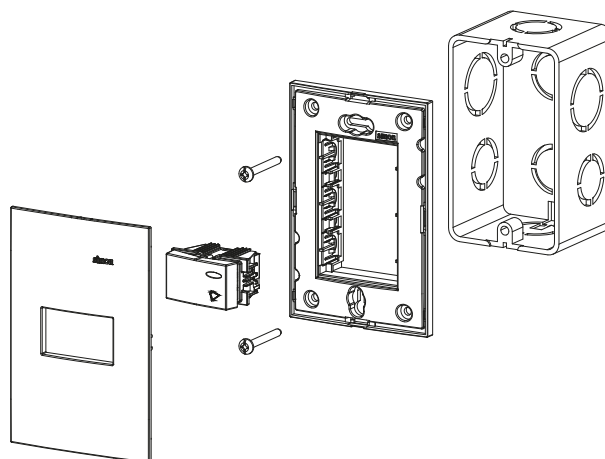