


Flush-mount wall frame and frame holders for 2 double elements white Simon 500 Cima

REF. 51010102-030

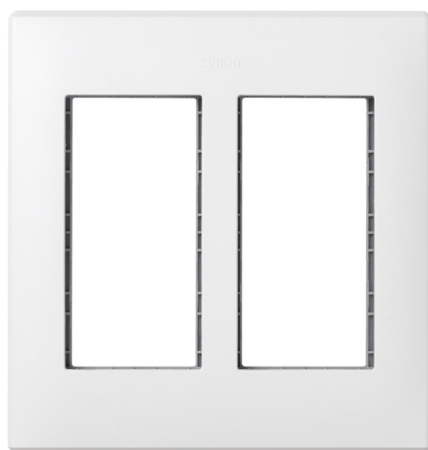

BASIC INFORMATION

FINISH

White

MATERIAL

Plastic

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using specific adaptors), combinable with the Simon Trunking range

PACKAGING CONTENTS

Flush-mount wall frame, frame holders, metal partition wall, ground connection cable and installation manual

ETIM CLASS

EC000007

REMARKS

Alternatively, you can screw the frame holders into the box if additional fastening is required.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

AVAILABLE IN

1, 2, 3, 4 and 6 double elements

IK CLASSIFICATION

07

NUMBER OF MODULES

4

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

INSULATION RESISTANCE (V-MΩ)

>5MΩ at 500V

RAL

9003

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

IP RATING

IP4X

RECESS DIMENSION (MM)

141 x 135 mm

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING

Secured by installing the metal partition wall in the housing fitted into the box for this purpose.

KIT AVAILABILITY

Yes

VERSION

2 double elements

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS

Only with tool

TYPE OF FASTENING

By direct snap-fit in the selected box (no tools needed for fastening)

INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

REMOVAL OF THE FRAME

Only with tool

INSTALLATION TYPE

Suitable for flush mounting on the wall

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Specific Simon 500 Cima

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-1:2005

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053091753

PACKAGING VOLUME

9.116

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

10

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

170

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING GROSS WEIGHT

0.163

PACKAGING WIDTH

165

PACKAGING NET WEIGHT

1.63

PRODUCT NET WEIGHT

0.163

PACKAGING LENGTH

325

PACKAGING WEIGHT UNIT

KGM

