Aluminium mini column with 2 sides for 10 elements per side and trims graphite Simon 500 Cima

REF. **52550225-033**



BASIC INFORMATION

DESCRIPTION

It is a of anodised aluminium mini column for 2 sides designed to fit 10 elements for each one of the sides. Consists of trims with graphite finish and measures 709 x 110 x 127 mm, the article is in compliance with the regulation and is suitable for installing on any floor type, whether this raised or concrete flooring. The shape of the baseboard of the mini-column makes it possible to this is incorporate into everyday perfectly with the floor trunking 85x18 mm It belongs to the Simon 500 Cima series, a collection that proposes an innovative connectivity system. This series is, without a doubt, the best option to enjoy a high speed data transmission. As for the maintenance of the mini-column, it is ideal to use a soft and dry cloth and wipe lightly, avoiding abrasive cleaners containing chlorine.

FINISH

Aluminium

MATERIAL

Aluminium

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

PACKAGING CONTENTS

Mini column, baseboard, lower and upper trim, non-slip adhesive foam, fixing studs, ground connection cable, screws and installation manual

ETIM CLASS

EC001941

REMARKS

The shape of the baseboard allows integration of the mini column with the 85 x 18 mm floor trunking

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
1 and 2 sides

MAX TEMP DURING CONSTRUCTION WORK (°C)
+120 °C

EARTHING RESISTANCE
< 0.05 Ohms

ELECTRICAL PROPERTIES
With electrical continuity

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Constant clearance between electric wiring and Voice, Data and Multimedia cables, eliminating electromagnetic interference and possible transmission errors.

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 to +120 °C

NUMBER OF MODULES
10 per side

VERSION
2 sides

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

SCREWS REQUIRED FOR FLOOR FIXING
4

REMOVAL OF TRIM FRAMES
Only with tool

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053094488

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
1.907

PRODUCT NET WEIGHT
1.907

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053094488

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
124

PACKAGING WIDTH
142

PACKAGING LENGTH
1170

PACKAGING MEASUREMENT UNIT
MMT

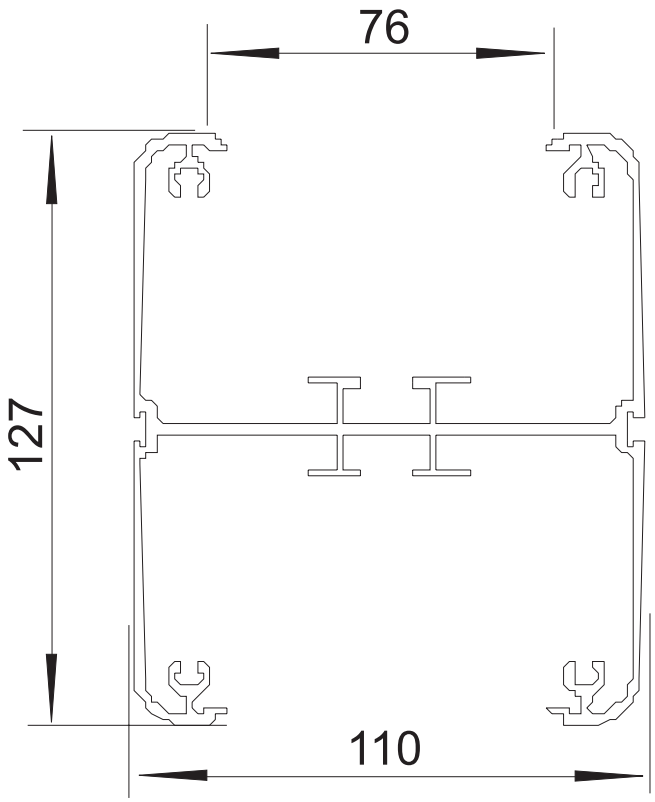
PACKAGING VOLUME
20601360

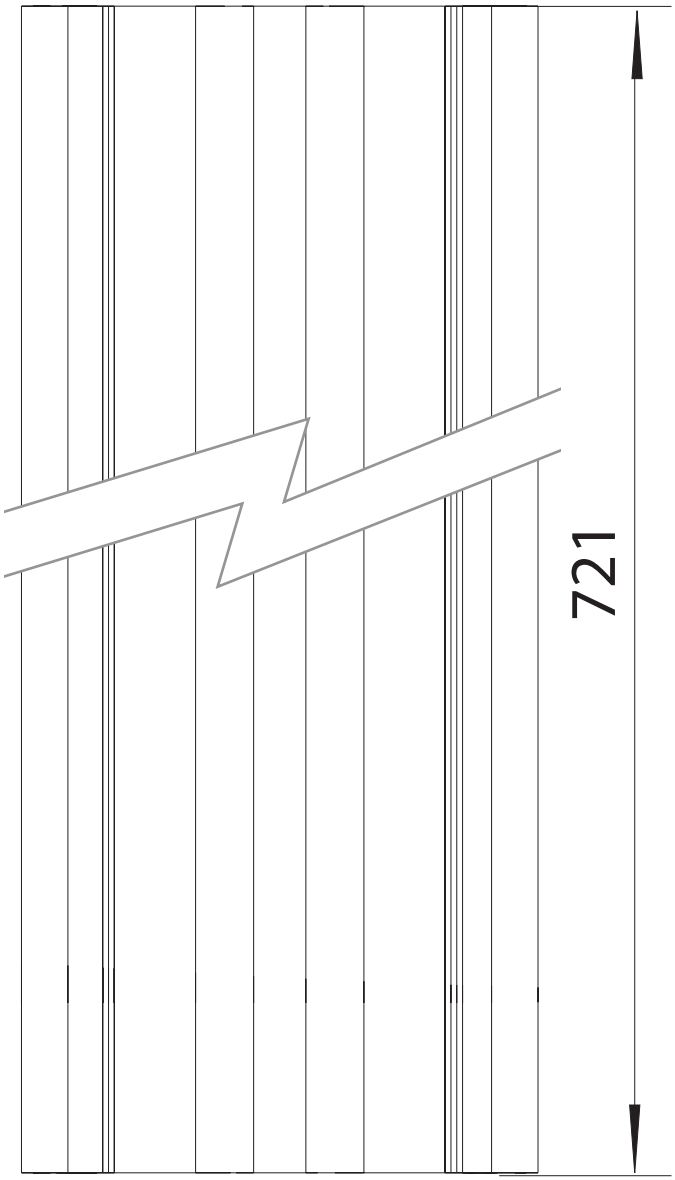
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.907

PACKAGING WEIGHT UNIT
KGM


76
127
110


721