

Downlight 735.20 WW Medium 1-10 V Black

REF. 73520138-683



BASIC INFORMATION

APPLICATION

Accent lighting, General lighting

PACKAGING CONTENTS

1 unit

ETIM CLASS

EC001744

TECHNICAL INFORMATION

IP RATING

IP20

DRIVER INCLUDED

Yes

LUMENS/W

2200 lm/22W

OPERATING TEMPERATURE RANGE (°C)

Max. temp.: 35°C

L70 (°C)

50,000 h

OPTICS

Medium

COLOR TEMPERATURE (K)

3000 K

L90 (°C)

50,000 h at 25 °C

PHOTOBIOLOGICAL CLASSIFICATION

Exempt category

CONTROL

1-10 V

COLOR TYPE

WW

POWER (W)

22 W

CRI

80

LIGHTING EFFICIENCY (LM/W)

100 lm/W

SERVICE LIFE

50.000 h

LUMENS (LM)

2200 lm


PHOTOMETRY ASSETS – CONICAL

0.5	0.70 0.67	E(0°) E(C90) E(C0)	34.8° 34.0° 34.0°	7776 2164 2218
1.0	1.39 1.35	E(0°) E(C90) E(C0)	34.8° 34.0° 34.0°	1944 541 555
1.5	2.09 2.02	E(0°) E(C90) E(C0)	34.8° 34.0° 34.0°	864 240 246
2.0	2.78 2.70	E(0°) E(C90) E(C0)	34.8° 34.0° 34.0°	486 135 139
2.5	3.48 3.37	E(0°) E(C90) E(C0)	34.8° 34.0° 34.0°	311 87 89
3.0	4.17 4.05	E(0°) E(C90) E(C0)	34.8° 34.0° 34.0°	216 60 62

Separación [m] Diámetro cónico [m] Intensidad luminica [lx]

— C0 - C180 (Semiángulo de dispersión: 68.0°)
— C90 - C270 (Semiángulo de dispersión: 69.6°)

PHOTOMETRY ASSETS – POLAR

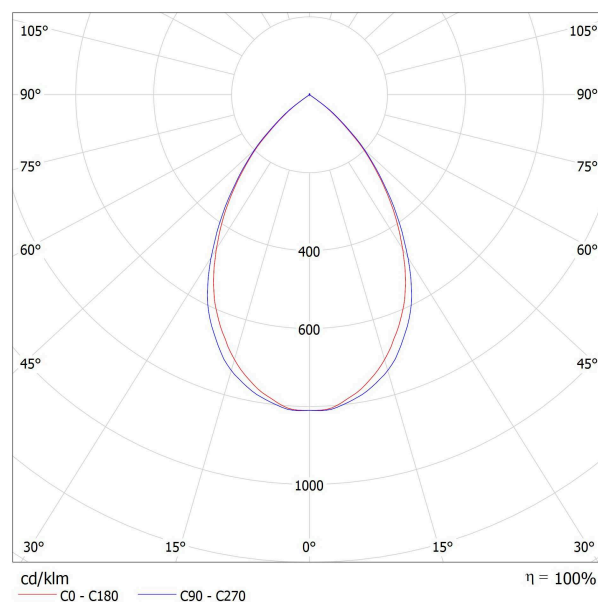

INSTALLATION AND MAINTENANCE

INSTALLATION ALTERNATIVES

Surface-mounted

INSTALLATION TYPE

Flush-mounted

REGULATIONS

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053087053

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053087053

PACKAGING VOLUME

9811125

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

135

PACKAGING GROSS WEIGHT

1.5

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

285

PACKAGING NET WEIGHT

1.2

UNITARY PACKAGING GROSS WEIGHT

1.5

PACKAGING LENGTH

255

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

1.2