
Front kit for 3 elements with 1 German socket outlet, 1 2xUSB charger, 1 blinds rocker and 1 rocker gloss black Simon 100

REF. **10020306-138**

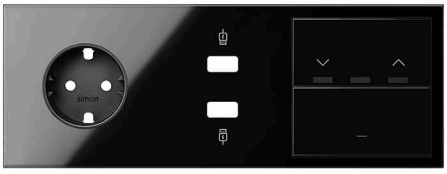

BASIC INFORMATION

DESCRIPTION

This front kit designed to occupy 3 elements has a 1 Schuko plug, and two USB charger sockets, 1 key, blinds and 1 key, all in black and an elegant glossy finish, is part of the Simon 100 range and being compatible with all the elements of this range.

The type of connection is b click and the USB by screw. The type of activation is by insertion. This device can be placed vertically and horizontally. For maintenance, it must be preserved in a temperature range of 5 to 40 ° C for operation and a temperature range of -25 to 50 ° C for storage.

It has been developed following regulations 2014/35 / UE LVD + directive 2014/30 / UE EMC + directive 2011/65 / UE RoHS + EN 50581: 2012 + EN 60669-1: 1999 + EN 60669-1: 1999 A1: 2002 + EN 60669-1: 1999 A2: 2008 * 2 + EN 60950-1: 2006 + EN 60950-1: 2006 A11: 2009 + EN 60950-1: 2006 A1: 2010 + EN 60950-1: 2006 A12: 2011 + EN 60950-1: 2006 A2: 2011 * 3 + ETSI-EN 301489-34 v14.1 * 3 + IEC 60884-1 Ed. 3.2 * 1 and is ready to be marketed in the EC.

FINISH

Gloss black

COMPATIBILITY

Kit mechanisms Simon 100

MATERIAL

Thermoplastic

ETIM CLASS

EC000007

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

NUMBER OF POSSIBLE ELEMENTS
3 elements

FORMAT
Schuko,USB

INDICATOR FUNCTION
Yes

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

MONOBLOCK
Yes

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
3 elements

INSTALLATION AND MAINTENANCE

INSTALLATION DIRECTION
Vertical and horizontal

INSTALLATION TYPE
Suitable for flush mounting

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + Directive 2014/30/UE EMC + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2: 2008*2 + EN 60950-1:2006 + EN 60950-1:2006 A11:2009 + EN 60950-1:2006 A1:2010 + EN 60950-1:2006 A12:2011 + EN 60950-1:2006 A2:2011*3 + ETSI-EN 301489-34 v14.1*3 + IEC 60884-1 Ed. 3.2*1

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053147726

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.133

PRODUCT NET WEIGHT
0.133

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053147726

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
25.3

PACKAGING WIDTH
226

PACKAGING LENGTH
84

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
480295.2

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.133

PACKAGING NET WEIGHT
0.133

PACKAGING WEIGHT UNIT
KGM