

## Modular luminaire 726 120x30 Low Glare WW

REF. 72661033-683



### BASIC INFORMATION

#### DESCRIPTION

Luminaire 726 modular 120 x 30 LowGlare, with lights led in warm colour (WW). It is part of the Simon series of modular luminaires 726. In this series we can find all kinds of products, perfect for the indoor lighting quality. This luminaire, in particular, is category B has 2900 lumens and a power 39 W The temperature of the colour is 3000 K and its microprismatic optics. The power supply of the luminaire is 220-240 V. Its design is presented with a stylish and versatile finished in aluminium. It measures 1195 x 295 millimetres and a weight exact of 2,6 kilos. The frequency of the product is of 50-60 Hz and withstands temperatures very variables (between -15 and + 40 degrees centigrade). The correct installation of the luminaire is made in false ceiling with the hardware needed.

#### DIFFUSER MATERIAL

PMMA

#### APPLICATION

General lighting

#### PACKAGING CONTENTS

1 unit

## TECHNICAL INFORMATION

### FREQUENCY

50 - 60 Hz

### DRIVER INCLUDED

Yes

### LUMENS (LM)

2900 lm

### IP RATING

IP20

### ELECTRICAL CLASS

Type 2

### LUMENS/W

2900 lm/39W

### OPERATING TEMPERATURE RANGE (°C)

-15 - 40 °C

### INTEGRATED POWER SUPPLY

No

### OPTICS

Microprismatic

### POWER SUPPLY (V~)

220/240 V~

### L70 (°C)

30,000 h at 25 °C

### PHOTOBIOLOGICAL CLASSIFICATION

Exempt category

### COLOR TEMPERATURE (K)

3000 K

### LIGHT BEAM APERTURE ANGLE (°)

90°

### POWER (W)

39 W

### CONTROL

On/Off

### COLOR TYPE

WW

### SERVICE LIFE

30.000 h

### CRI

80

### LIGHTING EFFICIENCY (LM/W)

74 lm/W

### CHROMATICS CRI ICONS

CRI  
80


## PHOTOMETRY ASSETS – CONICAL

|     |              |                                         |
|-----|--------------|-----------------------------------------|
| 0.5 | 0.96<br>0.96 | E(0°) 5534<br>E(C90) 1045<br>E(C0) 1038 |
| 1.0 | 1.92<br>1.92 | E(0°) 1384<br>E(C90) 261<br>E(C0) 260   |
| 1.5 | 2.88<br>2.89 | E(0°) 615<br>E(C90) 116<br>E(C0) 115    |
| 2.0 | 3.84<br>3.85 | E(0°) 346<br>E(C90) 65<br>E(C0) 65      |
| 2.5 | 4.79<br>4.81 | E(0°) 221<br>E(C90) 42<br>E(C0) 42      |
| 3.0 | 5.75<br>5.77 | E(0°) 154<br>E(C90) 29<br>E(C0) 29      |

Separación [m]      Diámetro cónico [m]      Intensidad luminica [lx]

— C0 - C180 (Semiángulo de dispersión: 87.8°)  
 — C90 - C270 (Semiángulo de dispersión: 87.6°)

## PHOTOMETRY ASSETS – POLAR

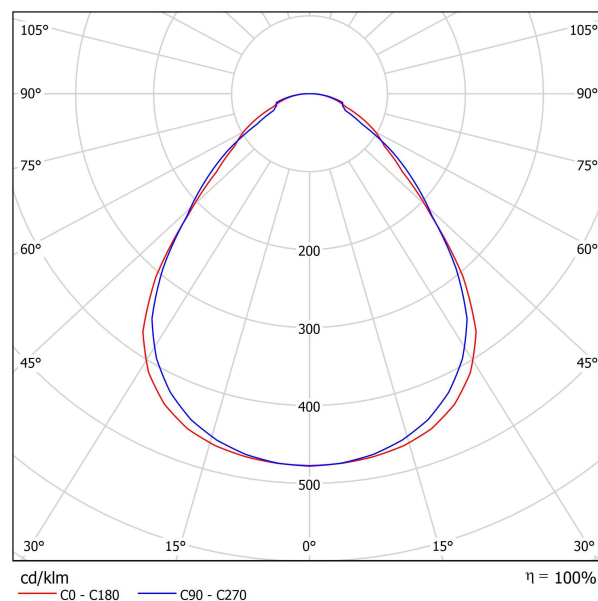

## INSTALLATION AND MAINTENANCE

### INSTALLATION ALTERNATIVES

Plaster ceiling, surface mount, flush mount, concealed profile and suspended

### MINIMUM INSTALLATION HEIGHT

250

### INSTALLATION TYPE

False ceiling, visible hardware

### TYPE OF TERMINAL

### CONNECTION - FUNCTION 1

Screw

## REGULATIONS

### WARRANTY

3 years 30,000 h

## LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT  
0

UNITARY PACKAGING WEIGHT  
UNIT  
KGM

PACKAGING MEASUREMENT  
UNIT  
MMT

UNITARY PACKAGING WIDTH  
0

PACKAGING EAN  
8421053194027

PACKAGING VOLUME  
2598750

UNITARY PACKAGING LENGTH  
0

UNITS CONTAINED PACKAGING  
1

PACKAGING VOLUME UNIT  
MMQ

UNITARY PACKAGING VOLUME  
0

PACKAGING HEIGHT  
1281

PACKAGING GROSS WEIGHT  
0

UNITARY PACKAGING GROSS  
WEIGHT  
3

PACKAGING WIDTH  
40

PACKAGING NET WEIGHT  
2.1

PRODUCT NET WEIGHT  
2.1

PACKAGING LENGTH  
350

PACKAGING WEIGHT UNIT  
KGM