

Duplex socket with isolated ground 15A 127V with screw terminal connection orange Simon 25 Plus

REF. 25426-59



BASIC INFORMATION

FINISH

Orange

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)

3,3 mm

CURRENT (A)

15 A

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VOLTAGE (V~)

127 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY
(MM)

11

TYPE OF TERMINAL
CONNECTION - FUNCTION 1

Screw

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

41.5

UNITARY PACKAGING GROSS
WEIGHT

70

PACKAGING LENGTH

227

UNITARY PACKAGING WIDTH

41

PRODUCT NET WEIGHT

70

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING LENGTH

67.2

UNITARY PACKAGING WEIGHT
UNIT

GRM

PACKAGING VOLUME

1.451

UNITARY PACKAGING
MEASUREMENT UNIT

MMT

PACKAGING EAN

7506020300784

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING VOLUME

0.114

UNITS CONTAINED PACKAGING

10

PACKAGING GROSS WEIGHT

0.7

UNITARY PACKAGING VOLUME
UNIT

DMQ

PACKAGING HEIGHT

46

PACKAGING NET WEIGHT

700

PACKAGING WIDTH

139

PACKAGING WEIGHT UNIT

KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO


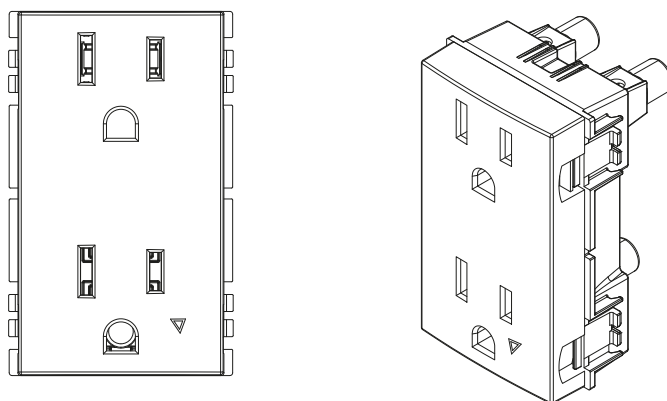


DIAGRAMA DE MONTAJE



*Placa y chasis NO incluidos

DIAGRAMA DE CONEXIÓN

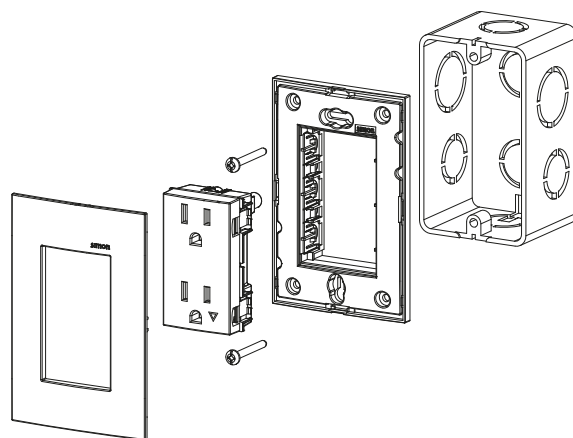