


MOOD 110 wall-mounted luminaire X-Less 2200-4000 K

REF. 91621104-899

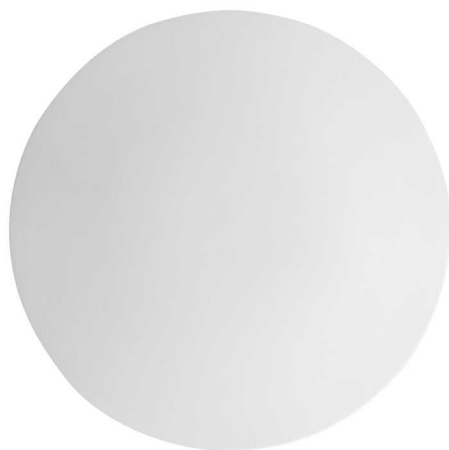

BASIC INFORMATION

FINISH

White

PACKAGING CONTENTS

1 Unit

APPLICATION

Domestic, Office, Retail, Hotel, Contract

ETIM CLASS

EC002892

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

DIRECTIONAL

No

LIGHTING EFFICIENCY (LM/W)

hasta 60 lm/W

IP RATING

IP20

DRIVER INCLUDED

No

LUMENS (LM)

76-96 lm

OPERATING TEMPERATURE RANGE (°C)

0 - 35 °C

ELECTRICAL CLASS

III

NUMBER OF LUMINAIRES

1

POWER SUPPLY (V~)

24 V~

ENERGY EFFICIENCY

A+

MACADAM STEPS

<3 Step MacAdam

COLOR TEMPERATURE (K)

2200 K - 4000 K

LIGHT BEAM APERTURE ANGLE (°)

112°

OPTICS

General 112°

CRI

80


COLOR TYPE

BIO


POWER (W)

3.8 W

CHROMATICS CRI ICONS



PHOTOMETRY ASSETS – POLAR

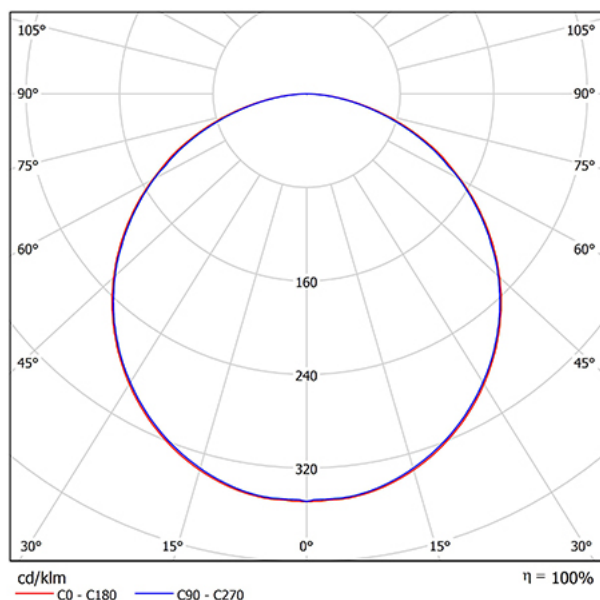

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE

Trimless

REGULATIONS

EAC MARKED

No

ECORRAE MARKED

Yes

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8436547047130

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8436547047130

PACKAGING VOLUME

897000

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

115

PACKAGING GROSS WEIGHT

0.21

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

130

PACKAGING NET WEIGHT

0.09

UNITARY PACKAGING GROSS
WEIGHT

0.21

PACKAGING LENGTH

60

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.09