Angled voice and data plate with dust cover for 1 element with 2 RJ45 category 6 UTP graphite Simon 500 Cima

REF. **50002086-038**



BASIC INFORMATION

DESCRIPTION

The angled voice and data plate with dust cover for an element with two category 6 UTP RJ45 connectors in graphite colour of the Simon 500 Cima series has dimensions of 50 x 50 x 42,5 mm and a cabling 22-24 AWG. The guarantee total that gives it metal components with self-extinguishing and halogen-free thermoplastic insulation. with which it has been manufactured. But in addition to being is a plate of voice and data with a very innovative design, this element stands out for the security that give the materials of its structure, which guarantees no flame propagation in case of fire and the low toxicity in case of smoke. This is one of the reasons that has made it one of the best-selling to be installed in different public buildings such as educational centres, hotels, hospitals or sports facilities.

FINISH

Graphite

COMPATIBILITY

Simon 500 Cima enclosures

PACKAGING CONTENTS

Angled voice and data plate with dust cover, 2 category 6 UTP RJ45 and installation manual

ETIM CLASS

EC000018

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
22-26 AWG wiring

RJ45 CONNECTION
With insertion tool

CONNECTOR CHARACTERISTICS
category 6 UTP

NUMBER OF CONNECTORS
2

RJ45 CONNECTORS
Included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

DUST PROTECTION
Yes

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
1

PLATE TYPE
Angled

RAL
7021

RJ45 ADAPTOR MODULE
Included in voice and data plate

SNAP-FIT RJ45 PLATES
Keystone I, II, ATT®/Avaya®

SNAP-FIT TYPE
Keystone I, II, ATT®/Avaya®

VERSION
Single

INSTALLATION AND MAINTENANCE

REMOVAL OF CONNECTOR

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.073

PRODUCT NET WEIGHT
0.073

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053097625

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
80

PACKAGING WIDTH
224

PACKAGING LENGTH
290

PACKAGING MEASUREMENT UNIT
MMT

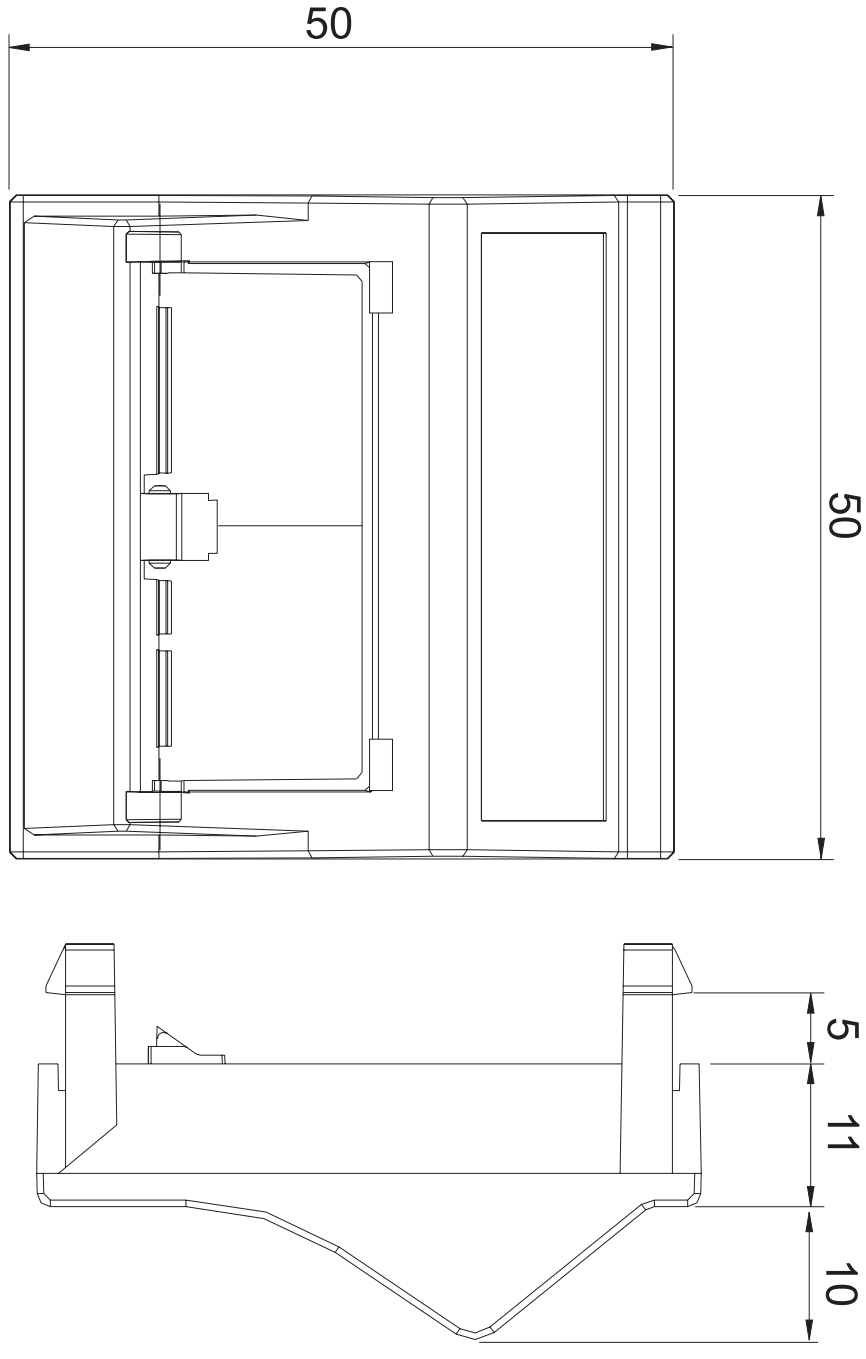
PACKAGING VOLUME
0.052

PACKAGING VOLUME UNIT
HLT

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.46

PACKAGING WEIGHT UNIT
KGM


50
50
5
11
10