


2-way switch for card with 1 micro switch and light indicator 250V~

REF. 26526-39

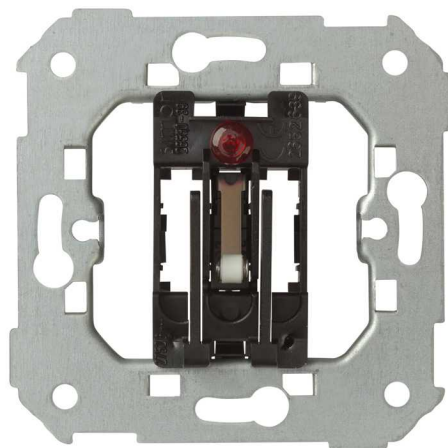

BASIC INFORMATION

DESCRIPTION

Simon 82 linking design and maximum functionality in its range of 2-way switches for card with a design of stylish and simple lines, guarantees the major innovation and security. This 2-way switch for card with indicator light, includes 1 microswitch and accepts power of 250 Volt voltage and an intensity of 6 Amps. Its installation, suitable for recessed or surface-mounted, you need to associating the article to a relay because, is not the case, the maximum current is 6 A (2 A inductive). To complete the installation requires welding, with a cross-cable section cross-section of 0.5 mm It is made of metal materials with halogen-free thermoplastic isolated that prevent the flame spread and toxicity by smoke in case of fire. It can reach maximum temperatures of -25 and 75 °C. The collection of 2-way switches for card of Simon 82, maximize the functionalities minimising the space.

COMPATIBILITY

Simon 27 Play, Simon 27 Neos,
Simon 27 Scudo, Simon 27,
Simon 44 Aqua, Simon 75, Simon
82 Detail, Simon 82 Nature and
Simon 82 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

A contactor must be installed at the output of the mechanism. If this is not done, the maximum current of the switch is 10 A resistive (1.5 A inductive). It is recommended to protect the faston connectors with a heat shrink sleeve.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 (1,5 ind.) A

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

0,5 mm

IP RATING

IP20

POWER SUPPLY (V~)

250 V~

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

FREQUENCY

50 Hz

TYPE OF MECHANISM

Card

VERSION

Single

INDICATOR FUNCTION

Yes

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CLAW

Simon 27

INSTALLATION DIRECTION

Horizontal, Vertical

KIT INSTALLATION DIRECTION

Vertical and horizontal

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Faston

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN IEC 61058-1:2018 | EN 61058-1-1:2016 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053250082

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

3017190

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.05

PRODUCT NET WEIGHT

0.05

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053024416

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

82

PACKAGING WIDTH

165

PACKAGING LENGTH

223

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3017190

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.5

PACKAGING NET WEIGHT

0.5

PACKAGING WEIGHT UNIT

KGM