# LANE 2400 linear luminaire 1-10 V HO Surface-mounted 3000 K Prismatic White

REF. **91302109-300**

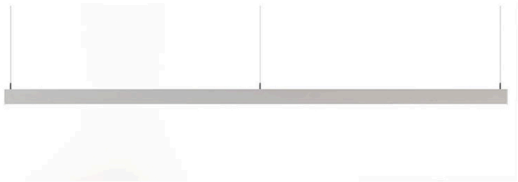

## BASIC INFORMATION

| BODY MATERIAL | APPLICATION | PACKAGING CONTENTS |
|---|---|---|
| Aluminium | Domestic,Office,Retail,Contract | 1 Unit |

simon

## TECHNICAL INFORMATION

FREQUENCY
50 - 60 Hz

IP RATING
IP20

OPERATING TEMPERATURE RANGE (ºC)
0 - 35 ºC

POWER SUPPLY (V~)
220/240 V~

RAL
9016

COLOR TEMPERATURE (K)
3000 K

CONTROL
1-10 V

CRI
90

CHROMATICS CRI ICONS

CRI
90

DIRECTIONAL
No

DRIVER INCLUDED
Yes

ELECTRICAL CLASS
I

ENERGY EFFICIENCY
A+

L70 (ºC)
100000h at 25ºC

L90 (ºC)
30000h at 25ºC

LIGHT BEAM APERTURE ANGLE (°)
95º

COLOR TYPE
NW

LIGHTING EFFICIENCY (LM/W)
hasta 97 lm/W

LUMENS (LM)
6480 lm

NUMBER OF LUMINAIRES
1

MACADAM STEPS
<3 Step MacAdam

OPTICS
Prismatic Opal 95º

POWER FACTOR (Φ)
>0,9

POWER (W)
73 W

## INSTALLATION AND MAINTENANCE

INSTALLATION TYPE
Surface-mounted/Suspended

simon

## REGULATIONS

EAC MARKED
No

ECORRAE MARKED
Yes

WARRANTY
5 years

## LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0

PRODUCT NET WEIGHT
4.5

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8436547086597

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
80

PACKAGING WIDTH
84

PACKAGING LENGTH
2400

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
16128000

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
4.95

PACKAGING NET WEIGHT
4.5

PACKAGING WEIGHT UNIT
KGM