


MOOD 25 wall-mounted luminaire X-Less 3000 K

REF. 91620104-399

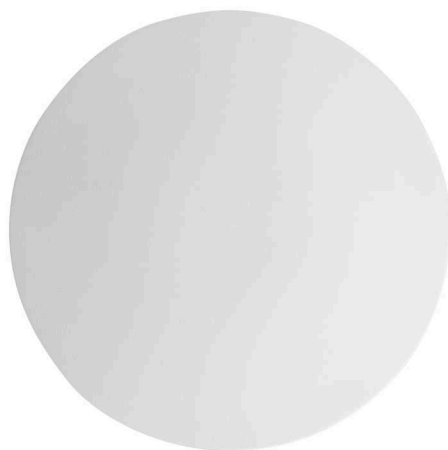

BASIC INFORMATION

FINISH

White

PACKAGING CONTENTS

1 Unit

APPLICATION

Domestic, Office, Retail, Hotel, Contract

ETIM CLASS

EC002892

REMARKS

The electric installation needs to have been done before fitting the Trimless accessory to the wall.

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

IP RATING

IP20

OPERATING TEMPERATURE
RANGE (°C)

0 - 35 °C

POWER SUPPLY (V~)

24 V~

COLOR TEMPERATURE (K)

3000 K

CRI

80

DIRECTIONAL

No

DRIVER INCLUDED

No

ELECTRICAL CLASS

III

ENERGY EFFICIENCY

A+

L70 (°C)

100000h at 25°C

LIGHT BEAM APERTURE ANGLE
(°)

112°

COLOR TYPE

NW

LIGHTING EFFICIENCY (LM/W)

hasta 60 lm/W

LUMENS (LM)

24 lm

NUMBER OF LUMINAIRES

1

MACADAM STEPS

<3 Step MacAdam


OPTICS

General 112°


POWER (W)

0.7 W

CHROMATICS CRI ICONS



PHOTOMETRY ASSETS – POLAR

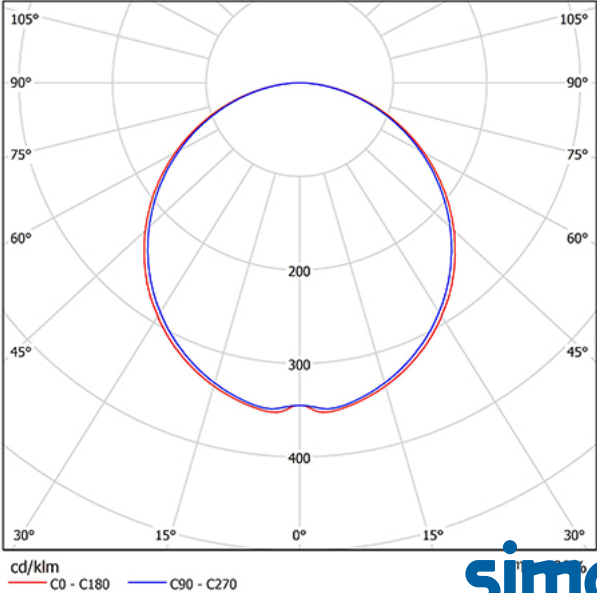

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE

Trimless

REGULATIONS

EAC MARKED

No

ECORRAE MARKED

Yes

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8436547047079

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.058

PRODUCT NET WEIGHT

0.045

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8436547047079

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

60

PACKAGING WIDTH

70

PACKAGING LENGTH

83

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

348600

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.058

PACKAGING NET WEIGHT

0.045

PACKAGING WEIGHT UNIT

KGM