


Voice and data angled plate with dust cover for 1 element and 1 RJ45 connector category 6 FTP black Simon K45

REF. K8096F/14

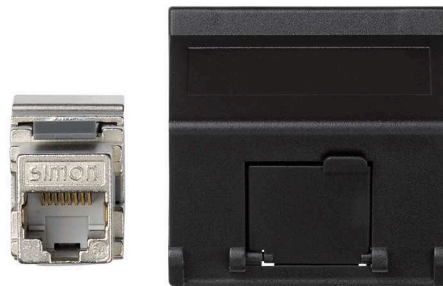

BASIC INFORMATION

DESCRIPTION

Take the maximum performance to the workplace solutions of their room with the plate for voice and data tilted plate with dust cover with 1 element and RJ45 connector category 6 FTP of the collection Simon K45, with finishes in black. Compatible with Keystone and cabling ports 22-24 AWG, its installation can be carried out on the surface-mounted or flush-mounted, without the need for screws to be direct snap-fit. Manufactured in self-extinguishing halogen-free thermoplastic, guarantees its security against fire and can reach temperatures of installation, ranging from -5 and 60 ° C Can be combined with the 90° positioner for voice and data plates that are installed in K45 Teleblock, columns or channels mechanism-holders, in the case of the need for installation in vertical. The elegance of black, compatible with all types of connections, and the guarantee of innovation and security, make the range Simon K45 voice and data plates on the option, perfect to make the most of your workplace solutions.

FINISH

Black

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Voice and data tilted plate with dust cover, direct module for snap-fit connector, RJ45 category 6 FTP connector and installation manual

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90° positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

DUST PROTECTION

Yes

NUMBER OF MODULES

Half

CABLE SECTION ADMITTED (MM)

22-24 AWG wiring

DUST SHUTTER

Yes

PLATE TYPE

Angled

AVAILABLE IN

Plate with 1 RJ45 connector

FORMAT

RJ45

RAL

7021

RJ45 CONNECTION

With insertion tool

IP RATING

IP20

RJ45 ADAPTOR MODULE

Supplied with the voice and data plate

CONNECTOR CHARACTERISTICS

Category 6 FTP

KIT AVAILABILITY

No

SNAP-FIT RJ45 PLATES

Keystone I, II, ATT®/Avaya®

RJ45 CONNECTORS

Included in voice and data plate

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT TYPE

Keystone I, II, ATT®/Avaya®

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

VERSION

Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.026

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

2871375

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436042438

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

287138

UNITS CONTAINED PACKAGING

10

PACKAGING GROSS WEIGHT

0.26

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING HEIGHT

95

PACKAGING NET WEIGHT

0.26

UNITARY PACKAGING GROSS WEIGHT

0.026

PACKAGING WIDTH

155

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

195